
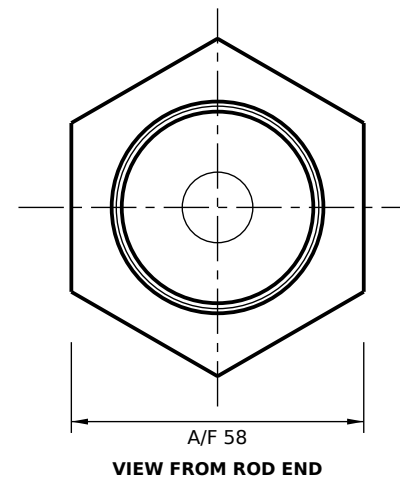


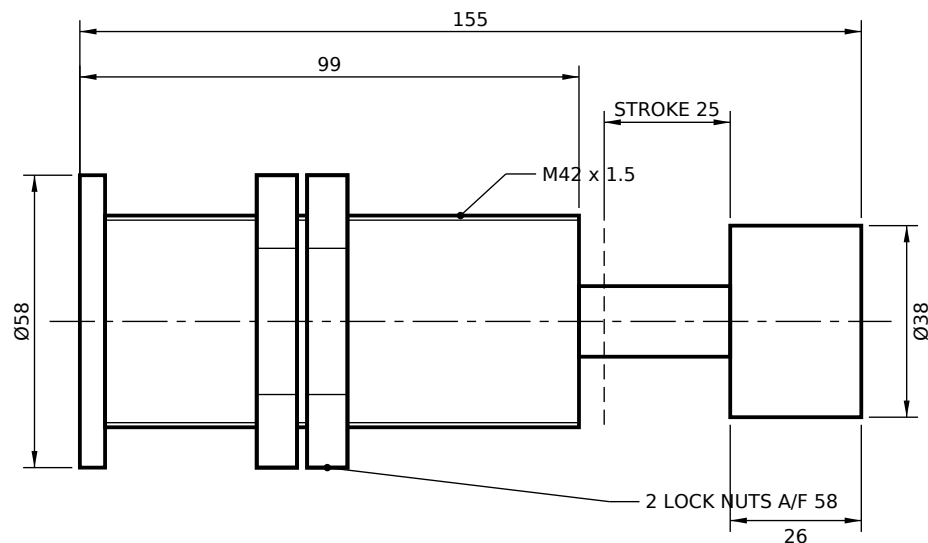

Technical Parameters

Stroke	25	mm
Thread	M 42X1.5	
Energy capacity per cycle	250	Nm
Energy capacity per hour	132,000	Nm/h
Effective mass range	35 - 10,000	kg
Return spring force	60 - 90	N
Damping	Adjustable	
Rod end shown	PU cap (std)	
Weight (approx.)	1200	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 26), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Damping adjustable at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in		
	NAME		SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI				31-01-23		AD 42-25-M ADJUSTABLE SHOCK ABSORBER - GA			
CHK'D										
APPV'D	PARESH ADAVANI				02-02-23		DWG NO.		A4	
MFG							AT/GA/AD/42-25-M			
Q.A										
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 1200 g			SCALE: 1:1.5		SHEET 1 OF 1		