
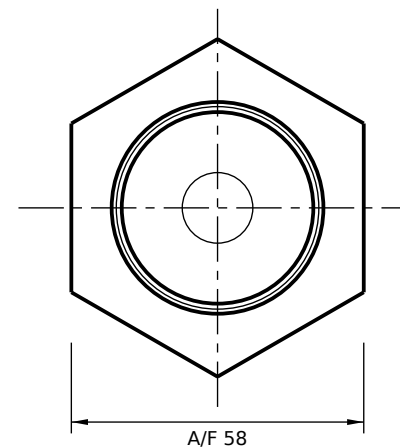


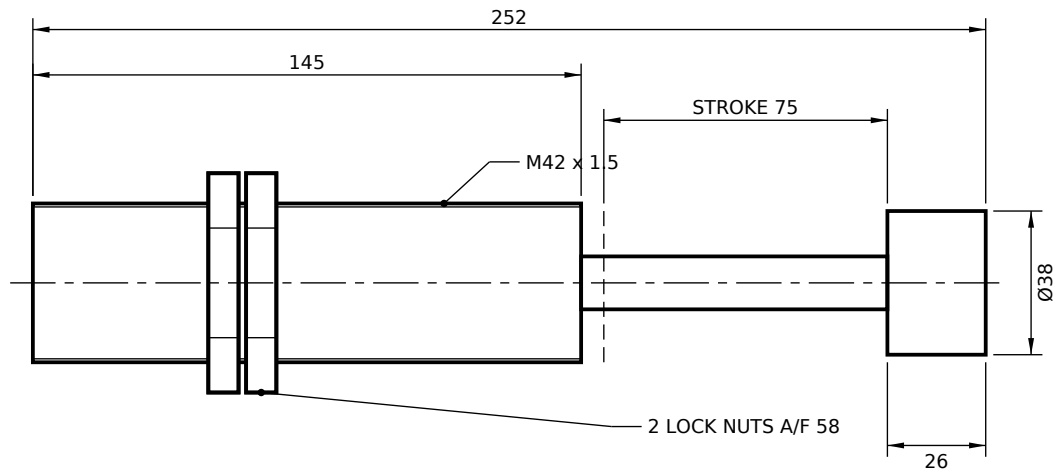

VIEW FROM ROD END (SCALE 1:1.5)

Technical Parameters

Stroke	75	mm
Thread	M 42X1.5	
Energy capacity per cycle	750	Nm
Energy capacity per hour	190,000	Nm/h
Effective mass range	60 - 200,000	kg
Return spring force	50 - 140	N
Damping	Adjustable	
Rod end shown	PU cap (std)	
Weight (approx.)	1900	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 26), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Damping adjustable at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		DRAWN: PARESH ADAVANI		SIGNATURE:		DATE: 04-02-23		 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
CHK'D:								TITLE: AD 42-75-M ADJUSTABLE SHOCK ABSORBER - GA	
APPV'D: PARESH ADAVANI						06-02-23		DWG NO.	
MFG:								AT/GA/AD/42-75-M	
Q.A:								A4	
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 1900 g		SCALE: 1:2		SHEET 1 OF 1	