


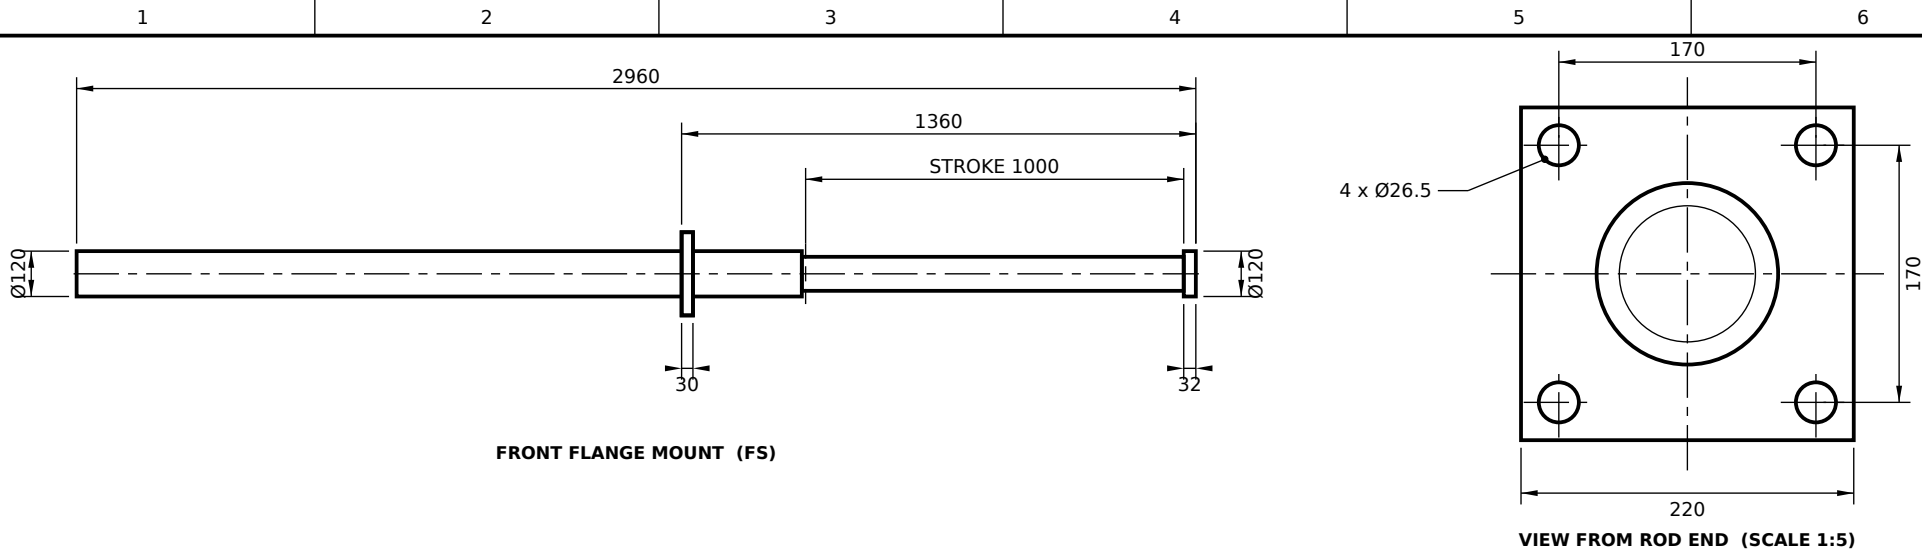

FRONT FLANGE MOUNT (FS)

VIEW FROM ROD END (SCALE 1:5)

Technical Parameters

Stroke	1000	mm
Energy capacity per cycle	280	kJ
Energy capacity per hour	14,500	kJ/h
Max. buffer force	350	kN
Recoil force (extension)	3.5	kN
Recoil force (compression)	40	kN
Permitted side-load angle	1.3	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	118	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FS front flange shown. Also available: RS rear flange, SS both flanges, RC rod clevis, TM, FM.
4. Optional accessories: B rubber bellow over rod, U urethane striker cap.
5. Working temperature 10 to 50 °C; SS construction and sensors on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in					
	NAME		SIGNATURE		DATE		TITLE: AKHG 120-1000-FS HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT DWG NO. AT/GA/AKHG/120-1000-FS A4				
DRAWN	PARESH ADAVANI				22-06-21						
CHK'D											
APPV'D	PARESH ADAVANI				24-06-21						
MFG											
Q.A											
MATERIAL:		Steel body, hard-chrome rod		WEIGHT:		118 kg		SCALE: 1:20		SHEET 1 OF 1	