



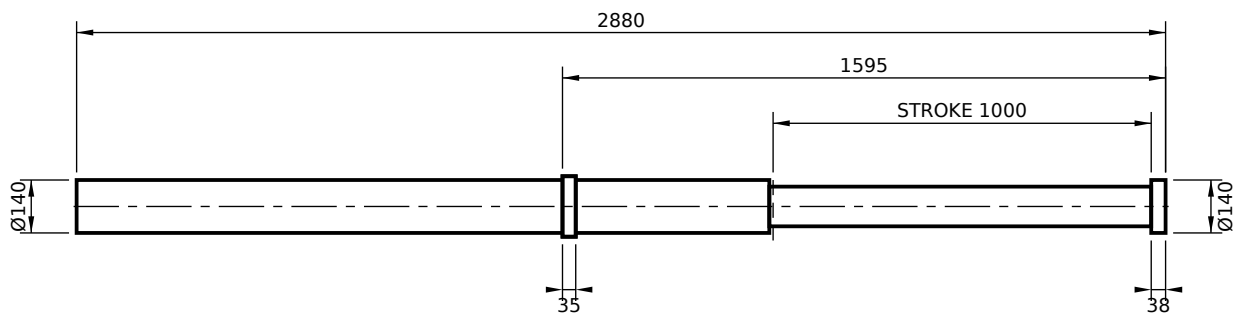

FRONT FLANGE MOUNT (FS)

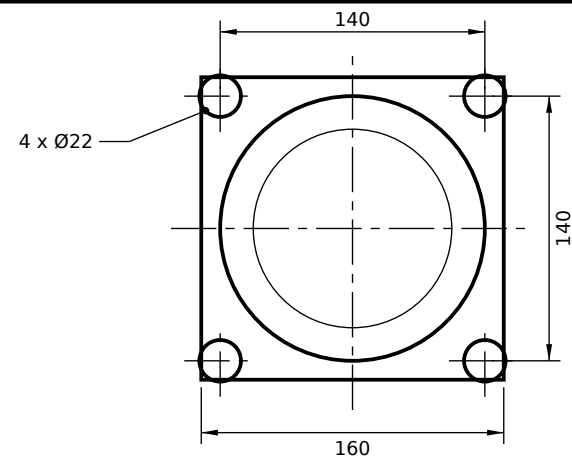

VIEW FROM ROD END (SCALE 1:4)

Technical Parameters

Stroke	1000	mm
Energy capacity per cycle	360	kJ
Energy capacity per hour	27,500	kJ/h
Max. buffer force	450	kN
Recoil force (extension)	5.5	kN
Recoil force (compression)	78	kN
Permitted side-load angle	1.2	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	200	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FS front flange shown. Also available: RS rear flange, SS both flanges, RC rod clevis, TM, FM.
4. Optional accessories: B rubber bellow over rod, U urethane striker cap.
5. Working temperature 10 to 50 °C; SS construction and sensors on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A	
				adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME		SIGNATURE		DATE		TITLE: AKHG 140-1000-FS HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT DWG NO. AT/GA/AKHG/140-1000-FS
DRAWN	PARESH ADAVANI				11-08-21		
CHK'D							
APPV'D	PARESH ADAVANI				13-08-21		
MFG							
Q.A							
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 200 kg		SCALE: 1:20		SHEET 1 OF 1	
						A4	