


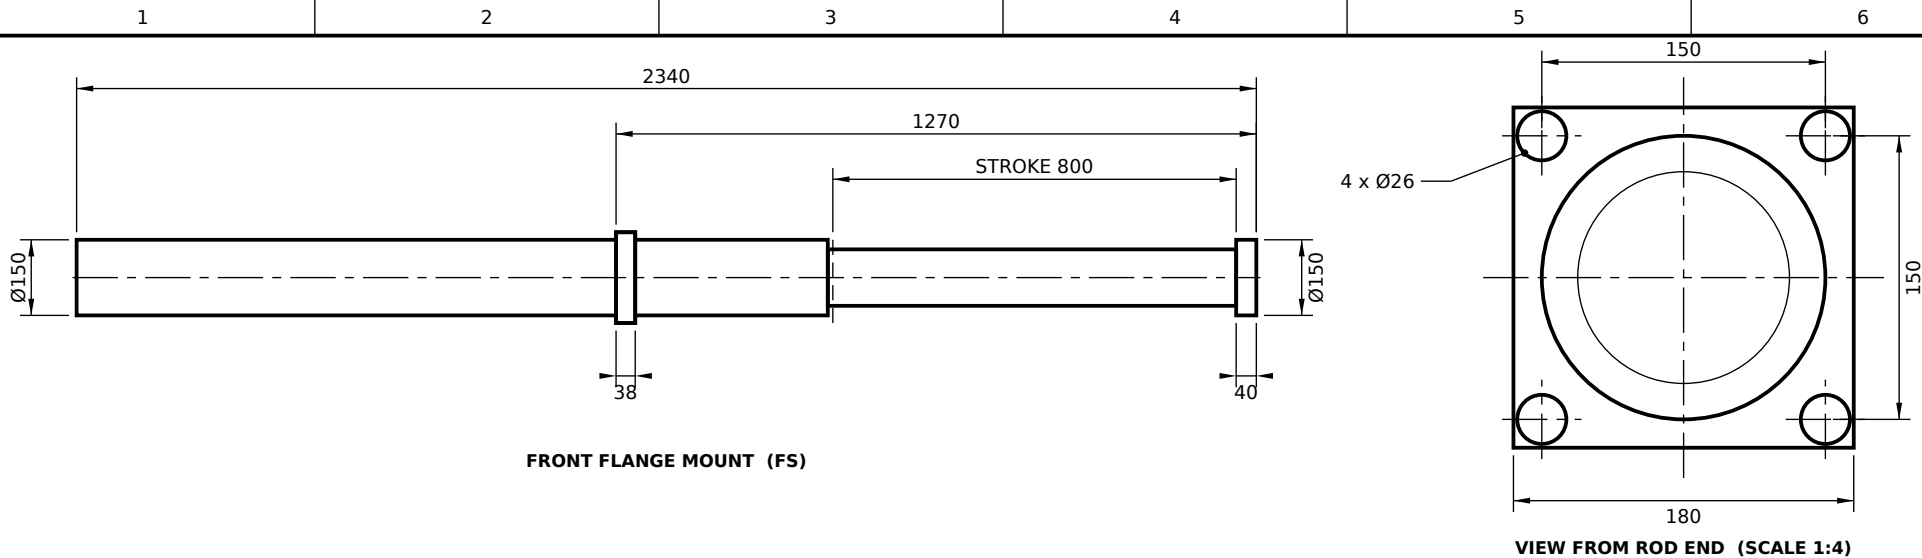

Technical Parameters

Stroke	800	mm
Energy capacity per cycle	367	kJ
Energy capacity per hour	25,600	kJ/h
Max. buffer force	580	kN
Recoil force (extension)	6	kN
Recoil force (compression)	85	kN
Permitted side-load angle	1.5	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	220	kg

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker cap face at full stroke.
- Mounting: FS front flange shown. Also available: RS rear flange, SS both flanges, RC rod clevis, TM, FM.
- Optional accessories: B rubber bellow over rod, U urethane striker cap.
- Working temperature 10 to 50 °C; SS construction and sensors on request.
- Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		NAME		SIGNATURE		DATE		TITLE:	
DRAWN		PARESH ADAVANI				08-09-21		AKHG 150-800-FS HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT	
CHK'D									
APPV'D		PARESH ADAVANI				10-09-21		DWG NO. AT/GA/AKHG/150-800-FS	
MFG									
Q.A								A4	
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 220 kg		SCALE: 1:15		SHEET 1 OF 1			