
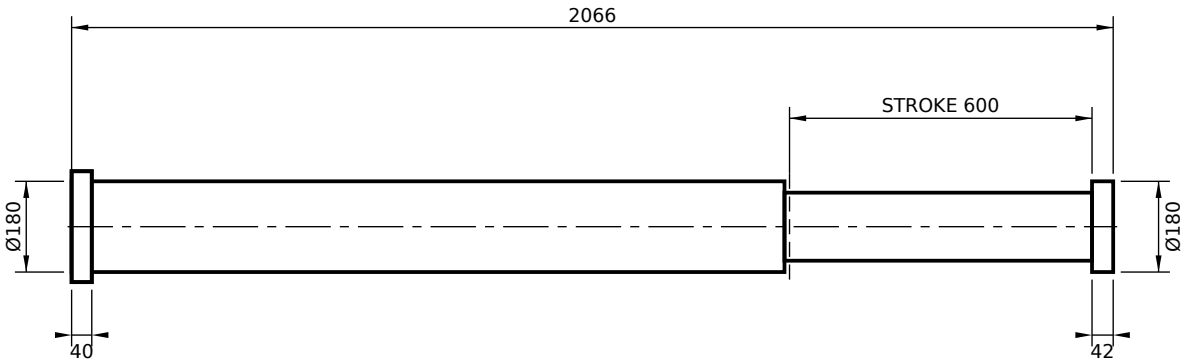


REAR FLANGE MOUNT (RS)

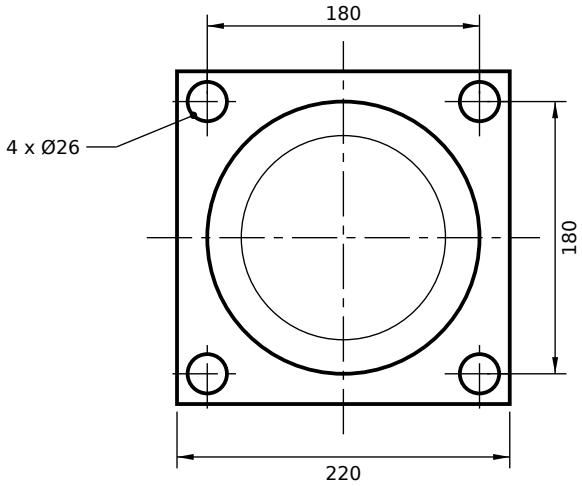

VIEW FROM ROD END (SCALE 1:5)

Technical Parameters

Stroke	600	mm
Energy capacity per cycle	430	kJ
Energy capacity per hour	23,000	kJ/h
Max. buffer force	890	kN
Recoil force (extension)	8	kN
Recoil force (compression)	100	kN
Permitted side-load angle	3.5	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	235	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: RS rear flange shown. Also available: FS front flange, SS both flanges, RC rod clevis, TM, FM.
4. Optional accessories: B rubber bellow over rod, U urethane striker cap.
5. Working temperature 10 to 50 °C; SS construction and sensors on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

adoniTech

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE	FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION A

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		04-10-21
CHK'D			
APPV'D	PARESH ADAVANI		06-10-21
MFG			
Q.A			

MATERIAL: Steel body, hard-chrome rod | WEIGHT: 235 kg

adoniTech
ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

AKHG 180-600-RS

HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT

DWG NO. **AT/GA/AKHG/180-600-RS** | **A4**

SCALE: 1:15 | SHEET 1 OF 1