


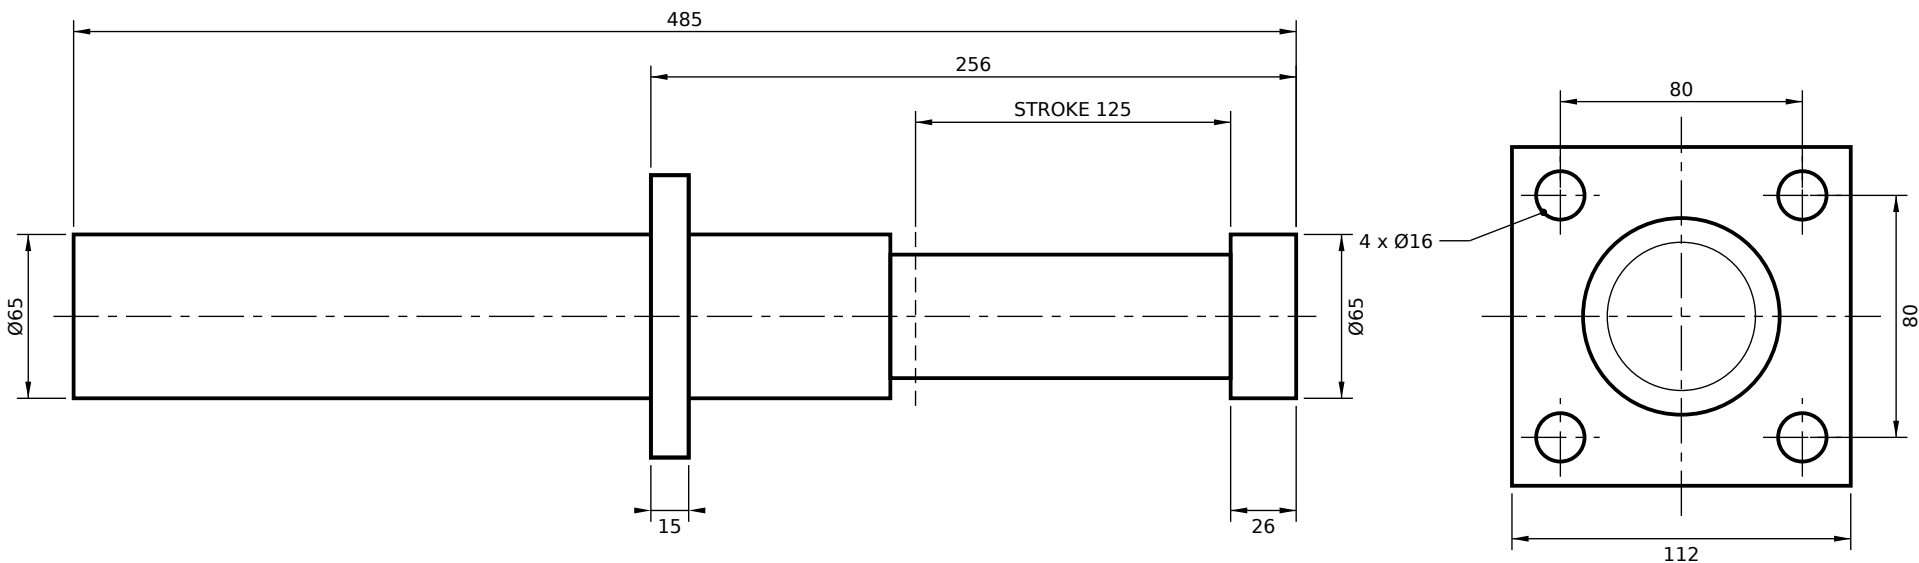

FRONT FLANGE MOUNT (FS)

VIEW FROM ROD END (SCALE 1:2.5)

Technical Parameters

Stroke	125	mm
Energy capacity per cycle	10	kJ
Energy capacity per hour	500	kJ/h
Max. buffer force	100	kN
Recoil force (extension)	2.4	kN
Recoil force (compression)	6.6	kN
Permitted side-load angle	2.5	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	10	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FS front flange shown. Also available: RS rear flange, SS both flanges, RC rod clevis, TM, FM.
4. Optional accessories: B rubber bellow over rod, U urethane striker cap.
5. Working temperature 10 to 50 °C; SS construction and sensors on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI				10-03-21		AKHG 65-125-FS			
CHK'D							HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT			
APPV'D	PARESH ADAVANI				12-03-21		DWG NO.		A4	
MFG							AT/GA/AKHG/65-125-FS			
Q.A										
MATERIAL: Steel body, hard-chrome rod			WEIGHT: 10 kg			SCALE: 1:3		SHEET 1 OF 1		