



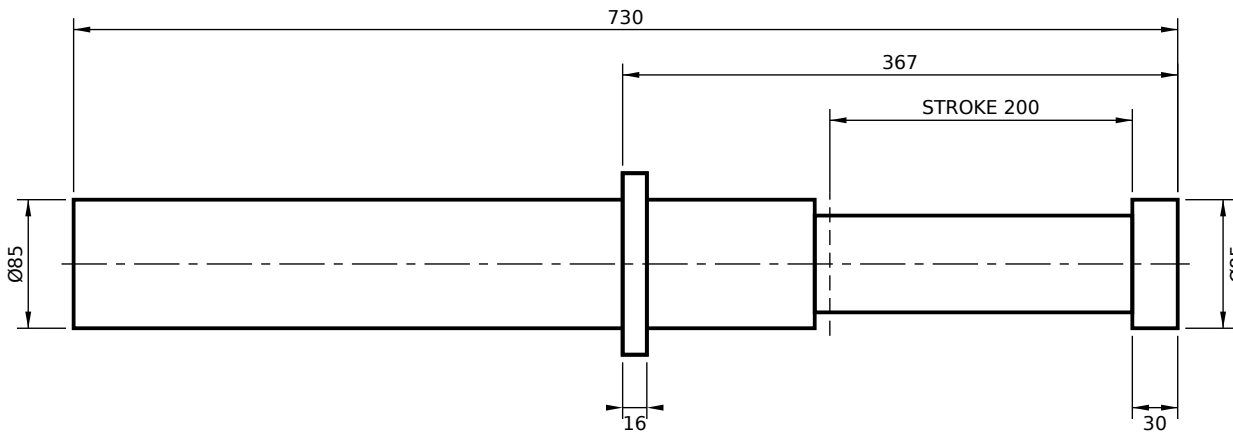

FRONT FLANGE MOUNT (FS)

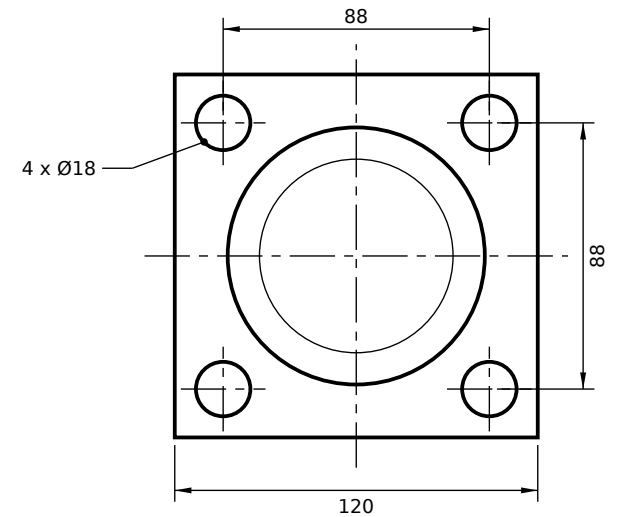

VIEW FROM ROD END (SCALE 1:2.5)

Technical Parameters

Stroke	200	mm
Energy capacity per cycle	32	kJ
Energy capacity per hour	2,400	kJ/h
Max. buffer force	200	kN
Recoil force (extension)	1.5	kN
Recoil force (compression)	19	kN
Permitted side-load angle	1.5	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	20	kg

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker cap face at full stroke.
- Mounting: FS front flange shown. Also available: RS rear flange, SS both flanges, RC rod clevis, TM, FM.
- Optional accessories: B rubber bellow over rod, U urethane striker cap.
- Working temperature 10 to 50 °C; SS construction and sensors on request.
- Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION A
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME	SIGNATURE	DATE	TITLE:	
DRAWN	PARESH ADAVANI		03-04-21	AKHG 85-200-FS HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT	
CHK'D					
APPV'D	PARESH ADAVANI		05-04-21	DWG NO.	
MFG				AT/GA/AKHG/85-200-FS	
Q.A					
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 20 kg		SCALE: 1:5	SHEET 1 OF 1