



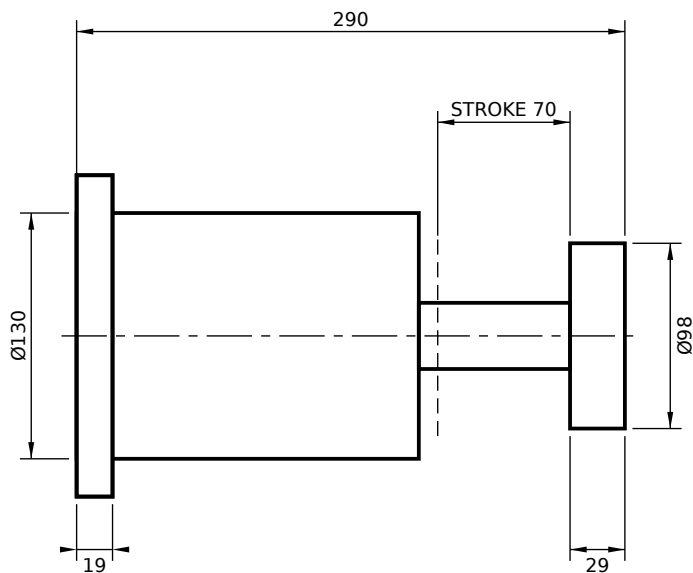

REAR FLANGE MOUNT (RS)

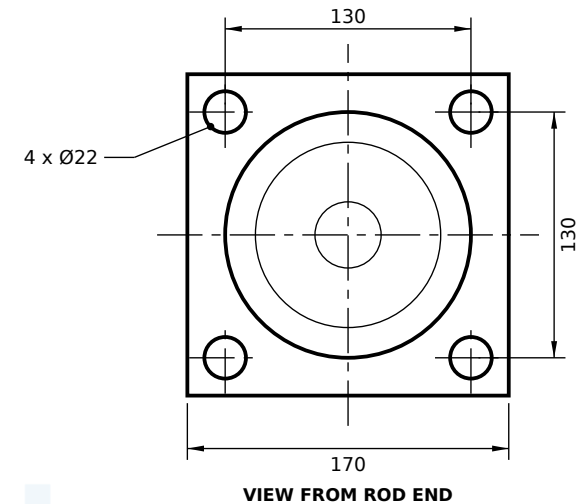

Technical Parameters

Stroke	70	mm
Energy capacity per cycle	12	kJ
Energy capacity per hour	180	kJ/h
Max. buffer force	179	kN
Recoil force (extension)	18.2	kN
Recoil force (compression)	42.5	kN
Permitted side-load angle	3	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	21	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Rear flange mounting, 4 bolts. Rubber bellow over rod supplied as standard.
4. Working temperature 10 to 50 °C; SS construction and sensors on request.
5. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		DRAWN PARESH ADAVANI		SIGNATURE		DATE 16-10-21		 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
CHK'D						TITLE: AKHS 130-70 HYDRAULIC BUFFER - GENERAL ARRANGEMENT			
APPV'D PARESH ADAVANI				18-10-21		DWG NO. AT/GA/AKHS/130-70		A4	
MFG									
Q.A									
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 21 kg		SCALE: 1:4		SHEET 1 OF 1	