
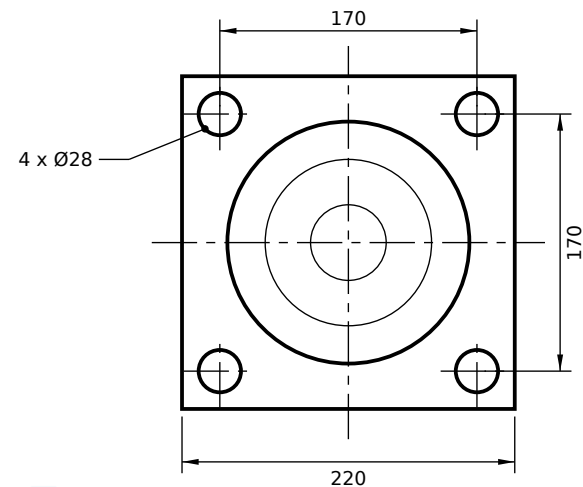


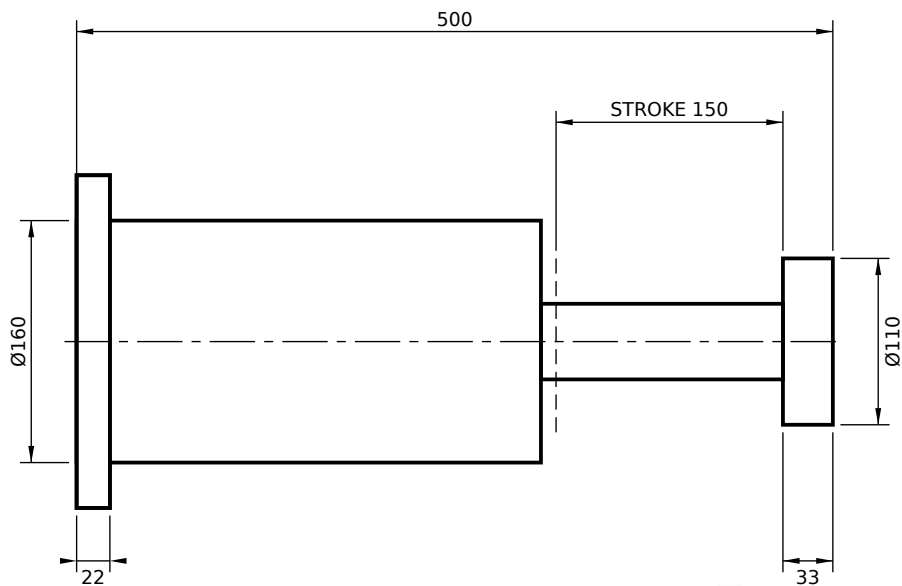

REAR FLANGE MOUNT (RS)

Technical Parameters

Stroke	150	mm
Energy capacity per cycle	44	kJ
Energy capacity per hour	574	kJ/h
Max. buffer force	340	kN
Recoil force (extension)	18.3	kN
Recoil force (compression)	53.5	kN
Permitted side-load angle	2	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	48	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Rear flange mounting, 4 bolts. Rubber bellow over rod supplied as standard.
4. Working temperature 10 to 50 °C; SS construction and sensors on request.
5. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION A
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME	SIGNATURE	DATE	TITLE: AKHS 160-150 HYDRAULIC BUFFER - GENERAL ARRANGEMENT	
DRAWN	PARESH ADAVANI		24-10-21		
CHK'D				DWG NO. AT/GA/AKHS/160-150	
APPV'D	PARESH ADAVANI		26-10-21		
MFG				A4	
Q.A					
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 48 kg		SCALE: 1:5	SHEET 1 OF 1