



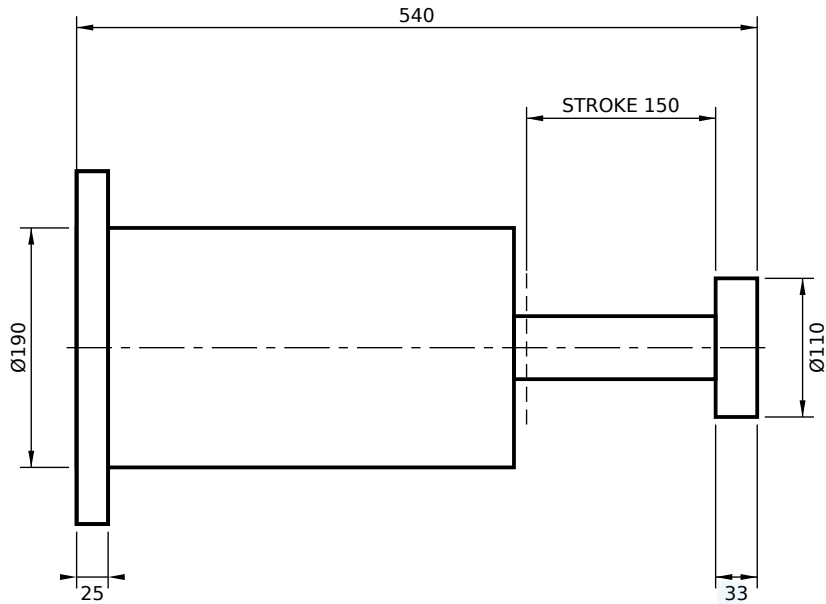

REAR FLANGE MOUNT (RS)

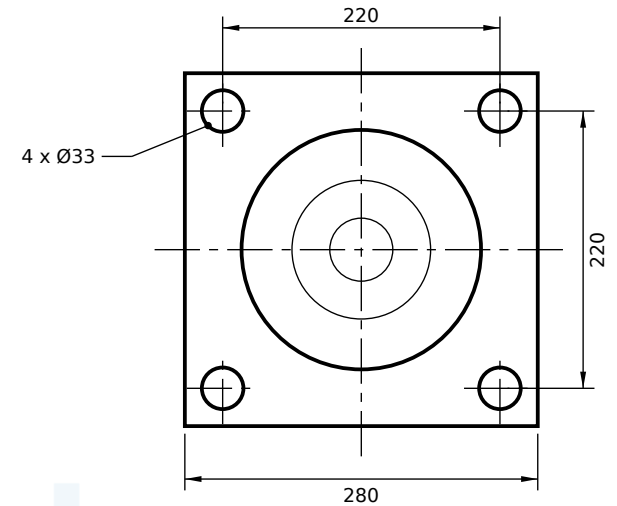

VIEW FROM ROD END

Technical Parameters

Stroke	150	mm
Energy capacity per cycle	65	kJ
Energy capacity per hour	840	kJ/h
Max. buffer force	500	kN
Recoil force (extension)	18.3	kN
Recoil force (compression)	53.5	kN
Permitted side-load angle	2	°
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	64	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Rear flange mounting, 4 bolts. Rubber bellow over rod supplied as standard.
4. Working temperature 10 to 50 °C; SS construction and sensors on request.
5. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE		AKHS 190-150 HYDRAULIC BUFFER - GENERAL ARRANGEMENT			
DRAWN	PARESH ADAVANI				28-10-21					
CHK'D							TITLE: AT/GA/AKHS/190-150			
APPV'D	PARESH ADAVANI				30-10-21					
MFG							DWG NO. A4			
Q.A										
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 64 kg		SCALE: 1:6		SHEET 1 OF 1				