


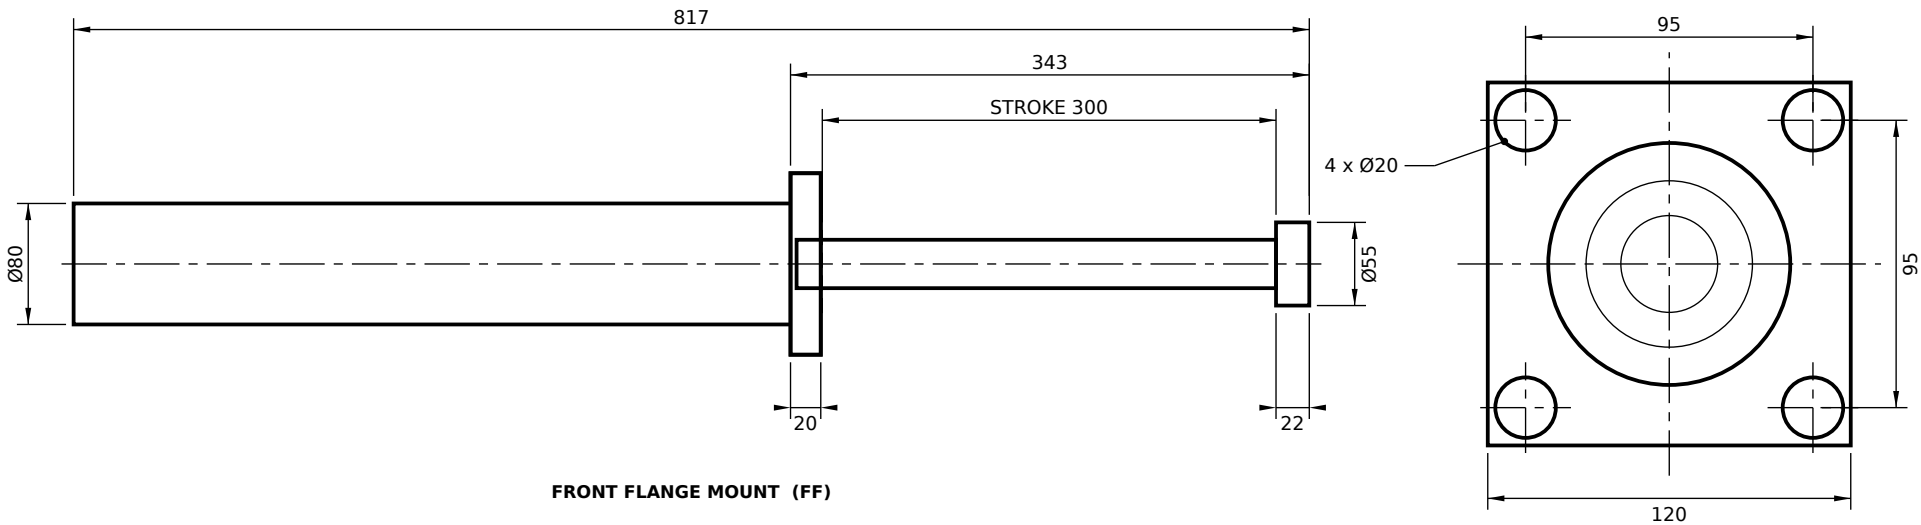

FRONT FLANGE MOUNT (FF)

VIEW FROM ROD END (SCALE 1:2.5)

Technical Parameters

Stroke	300	mm
Energy capacity per cycle	18,300	Nm
Energy capacity per hour	877,900	Nm/h
Max. shock force	70,060	N
Nominal return force	920	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	494 / 339	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	16	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE		TITLE: ED 1.5 x 12 HEAVY-DUTY HYDRAULIC BUFFER - GA			
DRAWN	PARESH ADAVANI				13-02-22					
CHK'D							DWG NO. AT/GA/ED/1.5X12			
APPV'D	PARESH ADAVANI				15-02-22					
MFG							A4			
Q.A										
MATERIAL: Steel body, hard-chrome rod			WEIGHT: 16 kg			SCALE: 1:5		SHEET 1 OF 1		