



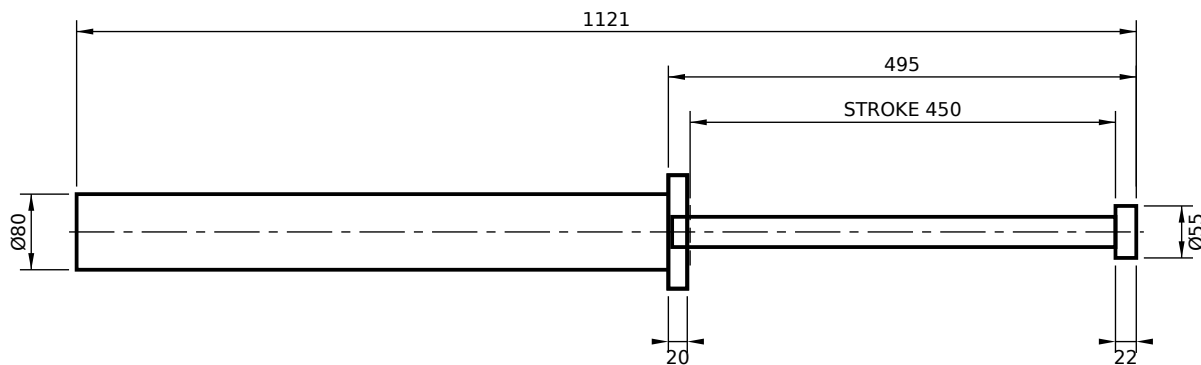

FRONT FLANGE MOUNT (FF)

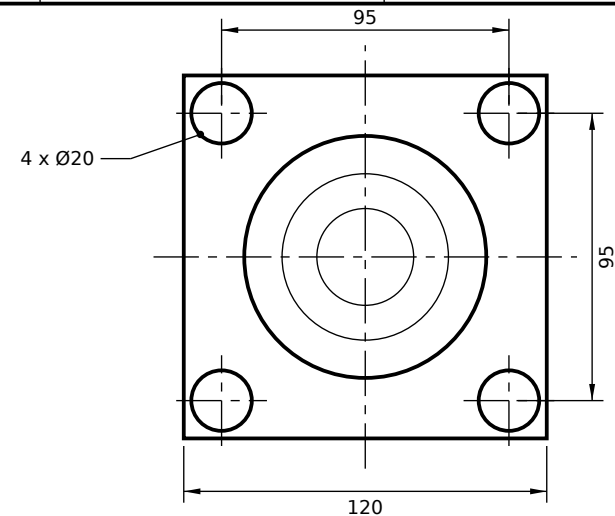

VIEW FROM ROD END (SCALE 1:2.5)

Technical Parameters

Stroke	450	mm
Energy capacity per cycle	25,300	Nm
Energy capacity per hour	1,166,700	Nm/h
Max. shock force	47,820	N
Nominal return force	1,120	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	646 / 491	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	19	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME	SIGNATURE		DATE		ED 1.5 x 18 HEAVY-DUTY HYDRAULIC BUFFER - GA			
DRAWN	PARESH ADAVANI			19-02-22					
CHK'D						DWG NO. AT/GA/ED/1.5X18			
APPV'D	PARESH ADAVANI			21-02-22					
MFG						A4			
Q.A									
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 19 kg		SCALE: 1:8		SHEET 1 OF 1			