


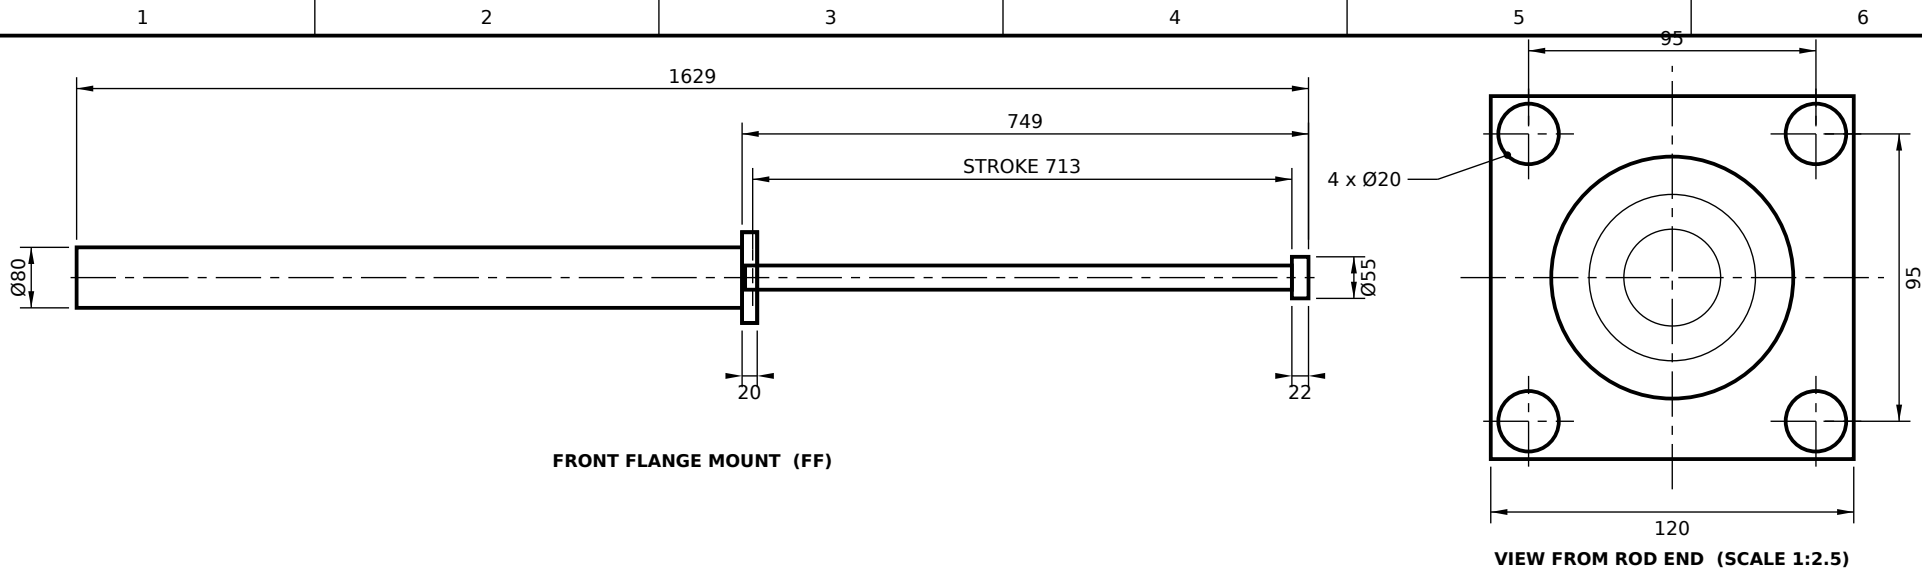

Technical Parameters

Stroke	713	mm
Energy capacity per cycle	33,600	Nm
Energy capacity per hour	1,649,300	Nm/h
Max. shock force	21,130	N
Nominal return force	1,120	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	900 / 745	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	20	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
						adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME		SIGNATURE		DATE		TITLE:				
DRAWN	PARESH ADAVANI				25-02-22		ED 1.5 x 28 HEAVY-DUTY HYDRAULIC BUFFER - GA				
CHK'D											
APPV'D	PARESH ADAVANI				27-02-22		DWG NO.				
MFG							AT/GA/ED/1.5X28		A4		
Q.A											
MATERIAL:		Steel body, hard-chrome rod		WEIGHT:		20 kg		SCALE: 1:10		SHEET 1 OF 1	