



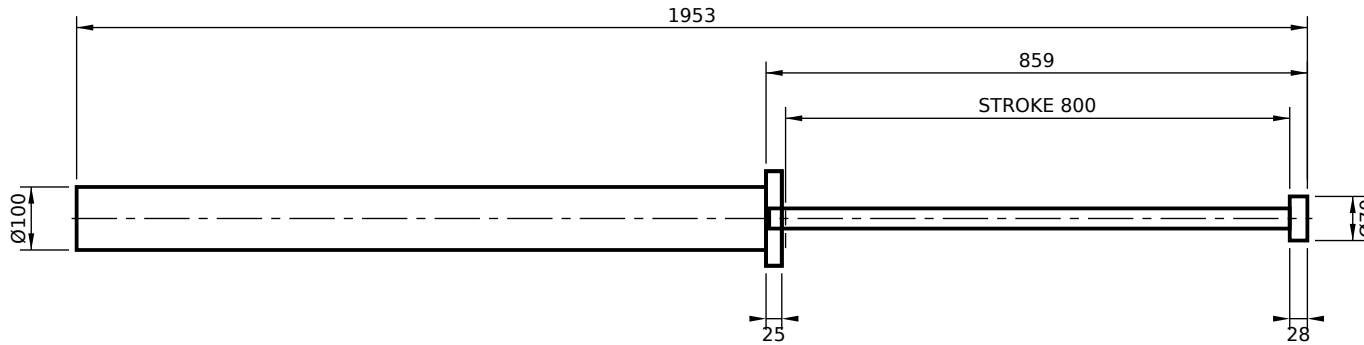

FRONT FLANGE MOUNT (FF)

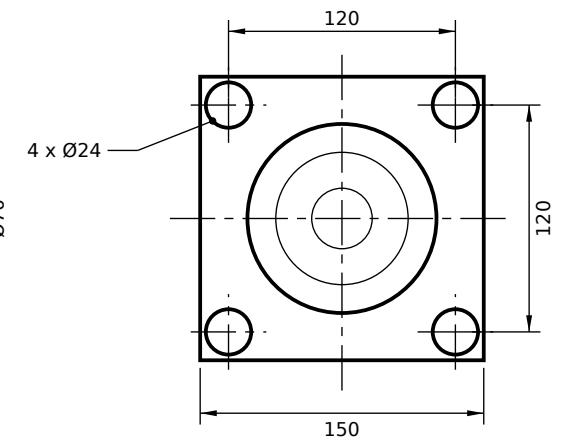

VIEW FROM ROD END (SCALE 1:4)

Technical Parameters

Stroke	800	mm
Energy capacity per cycle	70,700	Nm
Energy capacity per hour	70,700	Nm/h
Max. shock force	111,200	N
Nominal return force	2,290	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1119 / 854	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	49	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
								adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
		NAME		SIGNATURE		DATE		TITLE: ED 2.0 x 32 HEAVY-DUTY HYDRAULIC BUFFER - GA			
DRAWN		PARESH ADAVANI				21-03-22					
CHK'D											
APPV'D		PARESH ADAVANI				23-03-22					
MFG											
Q.A								DWG NO. AT/GA/ED/2.0X32		A4	
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 49 kg		SCALE: 1:12				SHEET 1 OF 1	