



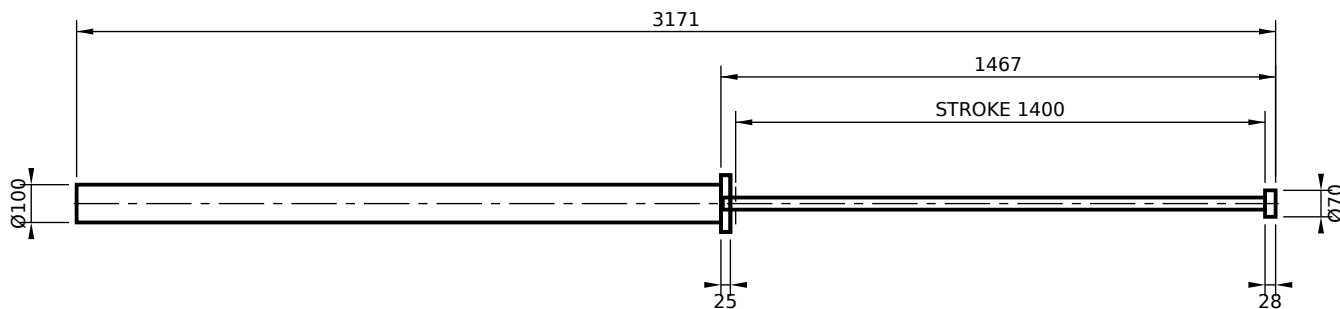

FRONT FLANGE MOUNT (FF)

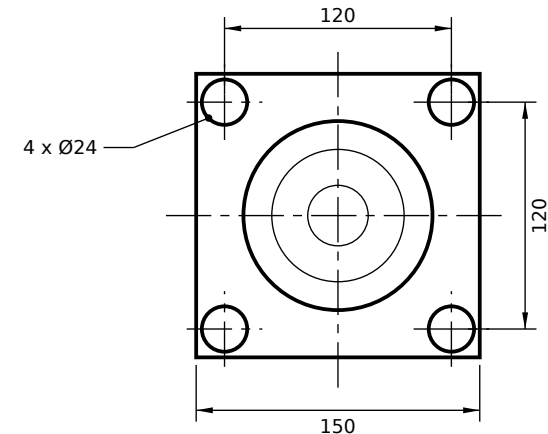

VIEW FROM ROD END (SCALE 1:4)

Technical Parameters

Stroke	1400	mm
Energy capacity per cycle	125,000	Nm
Energy capacity per hour	125,000	Nm/h
Max. shock force	35,100	N
Nominal return force	2,290	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1729 / 1462	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	73	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		NAME		SIGNATURE		DATE		TITLE:	
DRAWN		PARESH ADAVANI				29-03-22		ED 2.0 x 56 HEAVY-DUTY HYDRAULIC BUFFER - GA	
CHK'D									
APPV'D		PARESH ADAVANI				31-03-22			
MFG									
Q.A									
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 73 kg		SCALE: 1:20		SHEET 1 OF 1		DWG NO. AT/GA/ED/2.0X56	
								A4	