
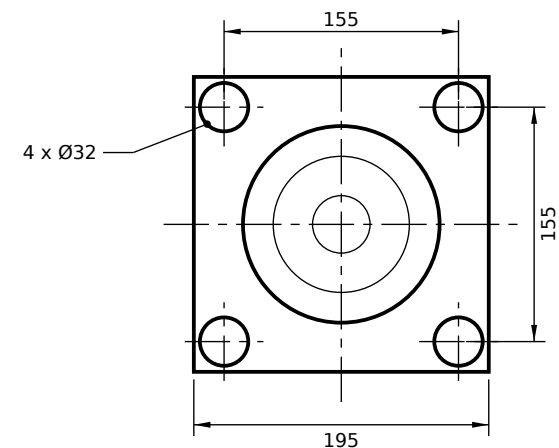


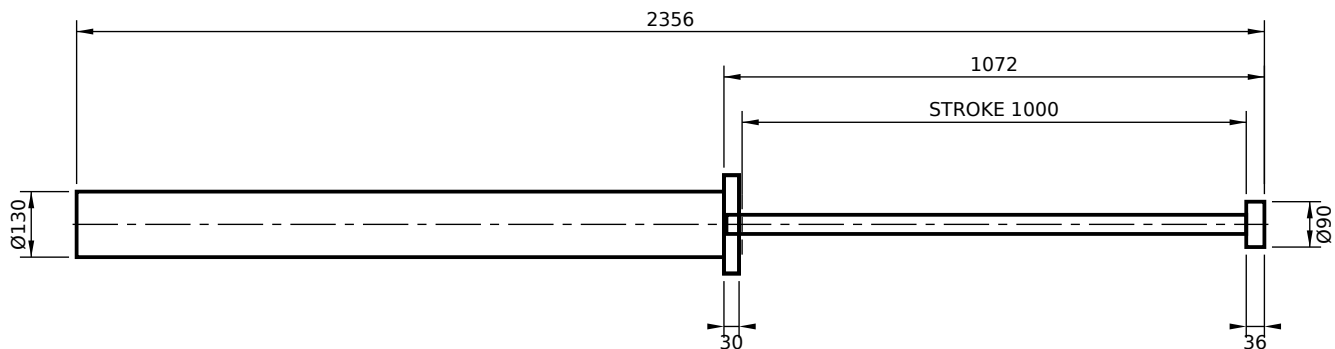

FRONT FLANGE MOUNT (FF)

VIEW FROM ROD END (SCALE 1:5)

Technical Parameters

Stroke	1000	mm
Energy capacity per cycle	159,600	Nm
Energy capacity per hour	3,637,200	Nm/h
Max. shock force	140,000	N
Nominal return force	2,895	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1314 / 1067	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	85	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A	
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME	SIGNATURE		DATE		TITLE: ED 3.0 x 40 HEAVY-DUTY HYDRAULIC BUFFER - GA	
DRAWN	PARESH ADAVANI			28-04-22			
CHK'D							
APPV'D	PARESH ADAVANI			30-04-22			
MFG							
Q.A						DWG NO. AT/GA/ED/3.0X40	
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 85 kg		SCALE: 1:15			
						SHEET 1 OF 1	
						A4	