
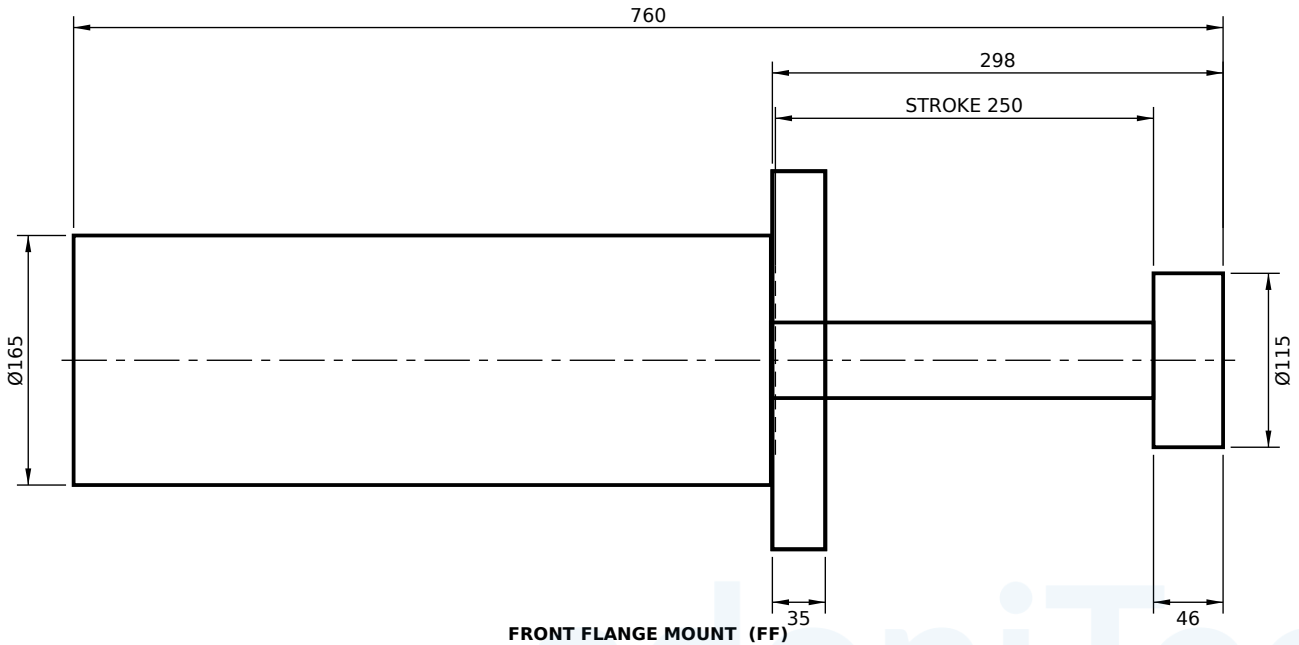


FRONT FLANGE MOUNT (FF)

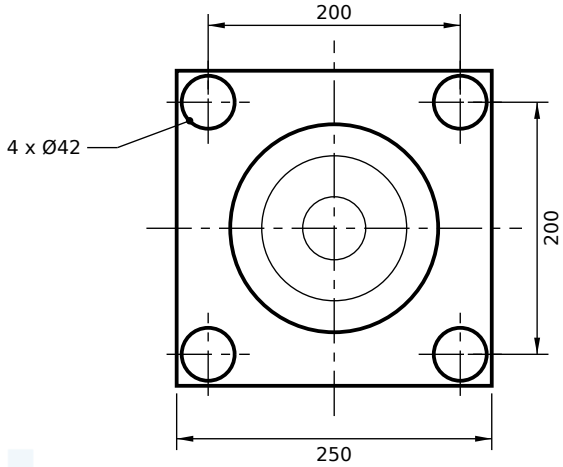

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	250	mm
Energy capacity per cycle	60,800	Nm
Energy capacity per hour	1,505,400	Nm/h
Max. shock force	300,250	N
Nominal return force	4,480	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	497 / 288	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	49	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

adoniTech

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
GENERAL ARRANGEMENT - OUTLINE ONLY
DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
PROJECTION: FIRST ANGLE

FINISH: Painted

DEBUR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING

REVISION **A**

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		18-05-22
CHK'D			
APPV'D	PARESH ADAVANI		20-05-22
MFG			
Q.A			

MATERIAL: Steel body, hard-chrome rod

WEIGHT: 49 kg

ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

ED 3.5 x 10

HEAVY-DUTY HYDRAULIC BUFFER - GA

DWG NO. **AT/GA/ED/3.5X10**

A4

SCALE: 1:5

SHEET 1 OF 1