



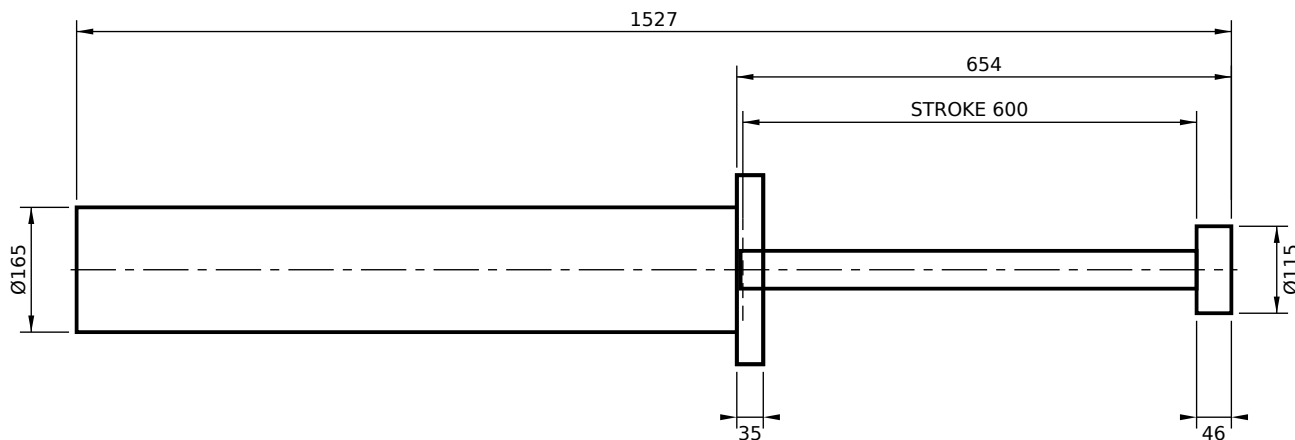

FRONT FLANGE MOUNT (FF)

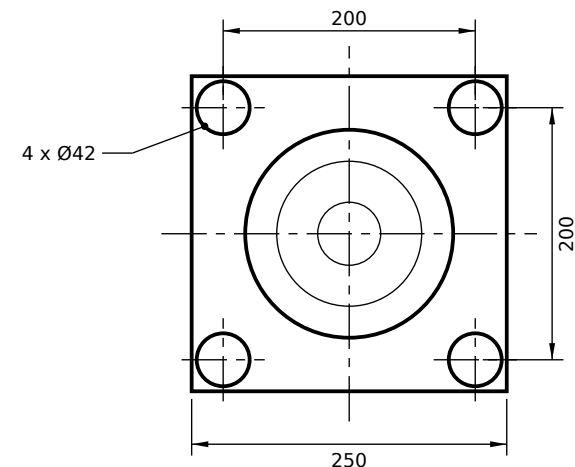

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	600	mm
Energy capacity per cycle	138,700	Nm
Energy capacity per hour	2,889,600	Nm/h
Max. shock force	300,250	N
Nominal return force	4,480	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	908 / 644	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	81	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A				
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in						
	NAME		SIGNATURE		DATE					TITLE:		
DRAWN	PARESH ADAVANI				26-05-22					ED 3.5 x 24 HEAVY-DUTY HYDRAULIC BUFFER - GA		
CHK'D												
APPV'D	PARESH ADAVANI				28-05-22							
MFG												
Q.A										DWG NO.		
										AT/GA/ED/3.5X24		A4
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 81 kg		SCALE: 1:10		SHEET 1 OF 1				