



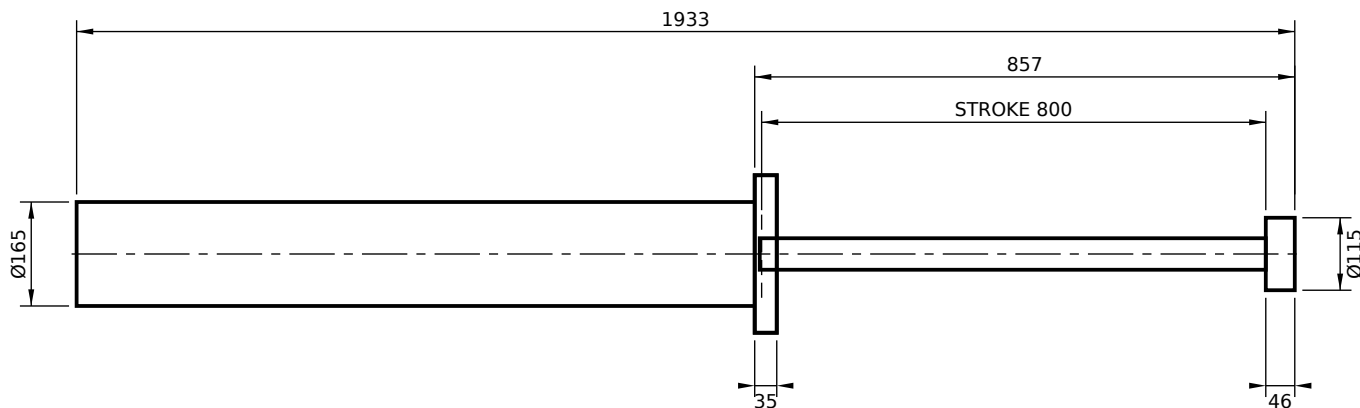

FRONT FLANGE MOUNT (FF)

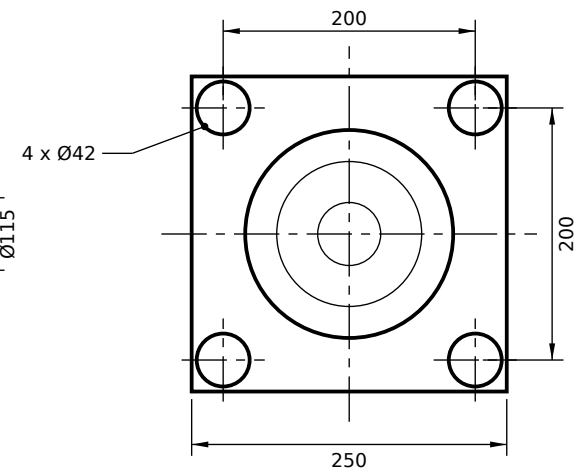

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	800	mm
Energy capacity per cycle	178,400	Nm
Energy capacity per hour	3,573,200	Nm/h
Max. shock force	300,250	N
Nominal return force	4,480	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1111 / 847	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	97	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in								
	NAME		SIGNATURE		DATE		TITLE: ED 3.5 x 32 HEAVY-DUTY HYDRAULIC BUFFER - GA			
DRAWN	PARESH ADAVANI				30-05-22					
CHK'D										
APPV'D	PARESH ADAVANI				01-06-22					
MFG										
Q.A							DWG NO.		AT/GA/ED/3.5X32	
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 97 kg		SCALE: 1:12			SHEET 1 OF 1	