



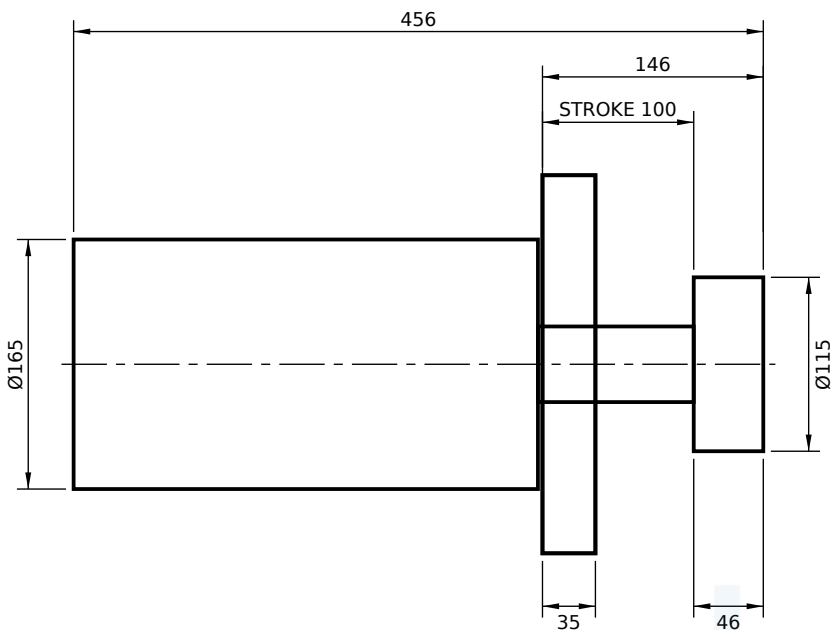

FRONT FLANGE MOUNT (FF)

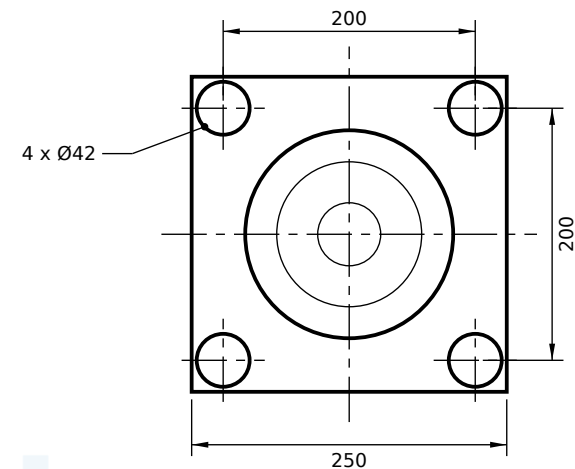

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	100	mm
Energy capacity per cycle	26,000	Nm
Energy capacity per hour	993,500	Nm/h
Max. shock force	300,250	N
Nominal return force	2,710	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	345 / 136	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	37	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		DRAWN PARESH ADAVANI		SIGNATURE		DATE 12-05-22		TITLE: ED 3.5 x 4 HEAVY-DUTY HYDRAULIC BUFFER - GA	
CHK'D								DWG NO. AT/GA/ED/3.5X4	
APPV'D PARESH ADAVANI				14-05-22				A4	
MFG									
Q.A									
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 37 kg		SCALE: 1:5		SHEET 1 OF 1	