



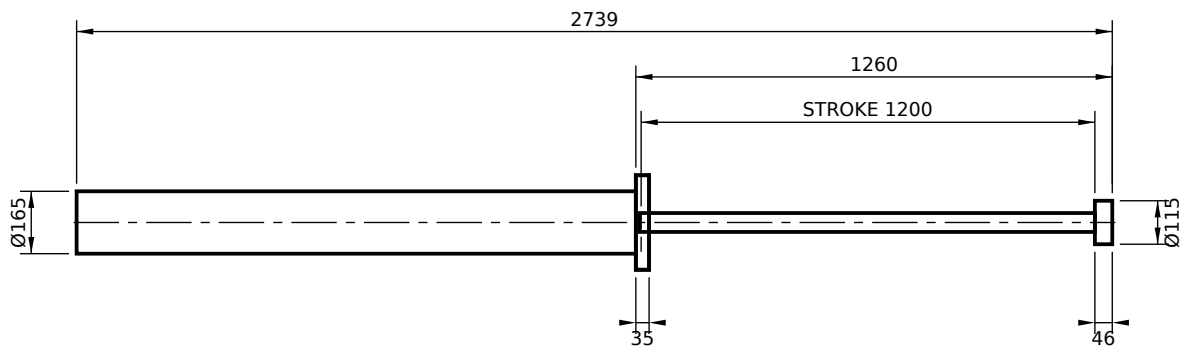

FRONT FLANGE MOUNT (FF)

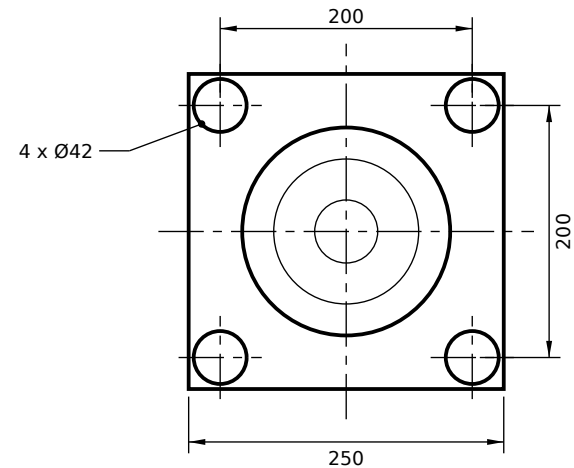

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	1200	mm
Energy capacity per cycle	247,200	Nm
Energy capacity per hour	4,930,500	Nm/h
Max. shock force	155,700	N
Nominal return force	4,480	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1514 / 1250	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	128	kg

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
- Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
- Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
- Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
- Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		NAME		SIGNATURE		DATE		TITLE:	
DRAWN		PARESH ADAVANI				05-06-22		ED 3.5 x 48 HEAVY-DUTY HYDRAULIC BUFFER - GA	
CHK'D									
APPV'D		PARESH ADAVANI				07-06-22		DWG NO. AT/GA/ED/3.5X48	
MFG									
Q.A								A4	
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 128 kg		SCALE: 1:20		SHEET 1 OF 1	