



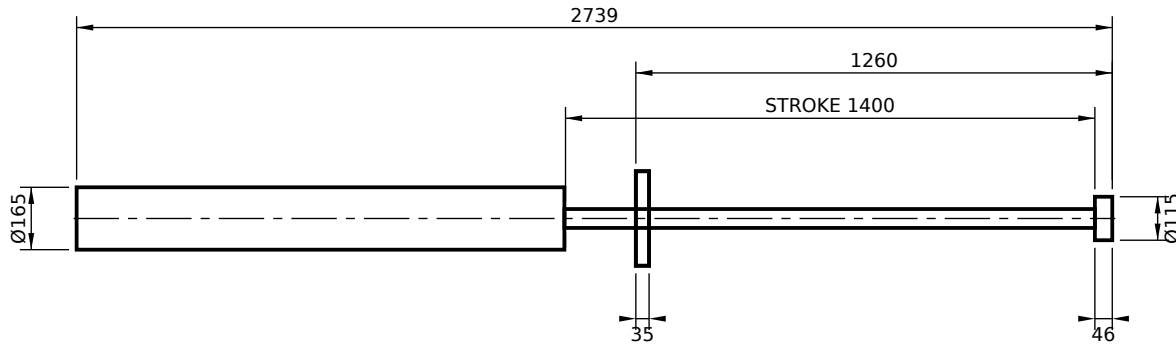

FRONT FLANGE MOUNT (FF)

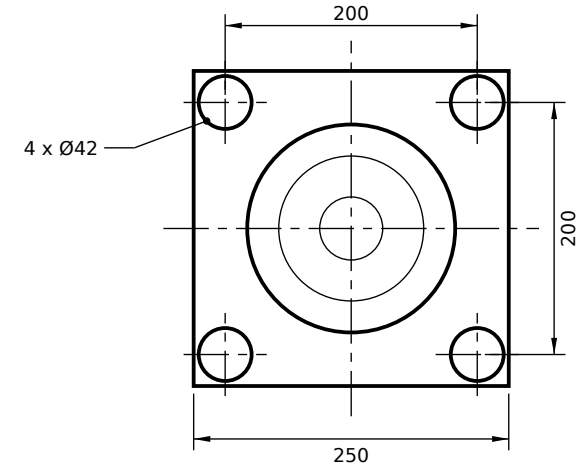

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	1400	mm
Energy capacity per cycle	273,300	Nm
Energy capacity per hour	5,604,000	Nm/h
Max. shock force	112,500	N
Nominal return force	4,480	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1514 / 1250	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	128	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		NAME		SIGNATURE		DATE		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
DRAWN		PARESH ADAVANI				07-06-22		ED 3.5 x 56 HEAVY-DUTY HYDRAULIC BUFFER - GA	
CHK'D									
APPV'D		PARESH ADAVANI				09-06-22			
MFG									
Q.A									
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 128 kg		SCALE: 1:20		SHEET 1 OF 1	

adoniTech

ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

ED 3.5 x 56

HEAVY-DUTY HYDRAULIC BUFFER - GA

DWG NO.

AT/GA/ED/3.5X56

A4