



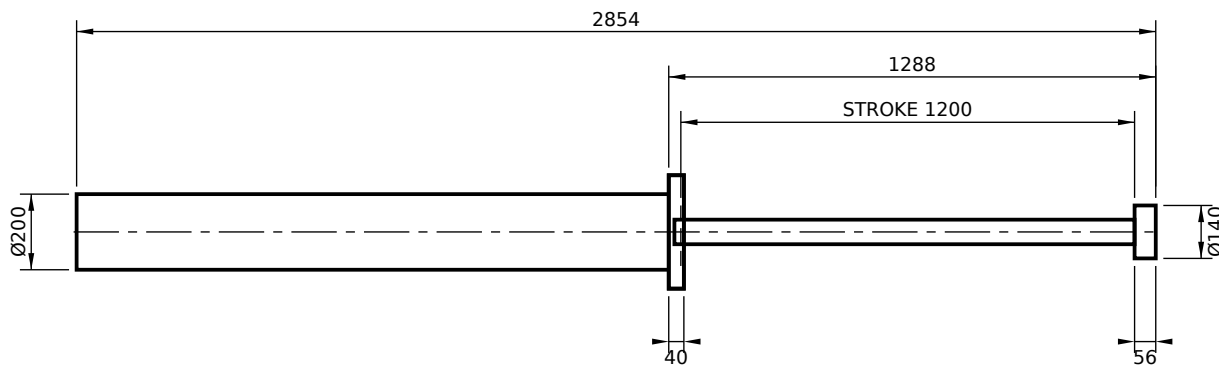

FRONT FLANGE MOUNT (FF)

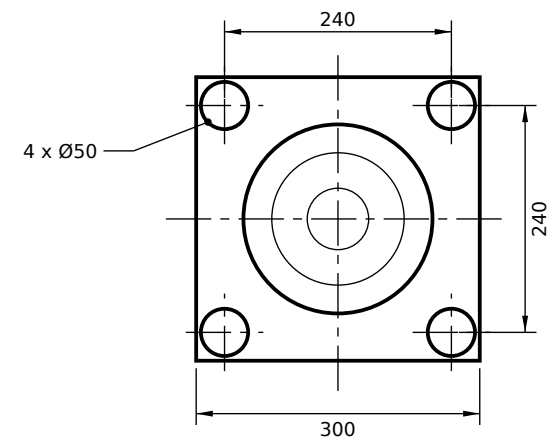

VIEW FROM ROD END (SCALE 1:8)

Technical Parameters

Stroke	1200	mm
Energy capacity per cycle	329,300	Nm
Energy capacity per hour	6,919,900	Nm/h
Max. shock force	200,000	N
Nominal return force	1,245	N
Max. cycle rate	30	cycles/h
Body length Y / rod projection Z	1606 / 1273	mm
Operating temperature	-10 to +60	°C
Weight (approx.)	220	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke. Internal air/oil accumulator return.
3. Front flange (FF) shown. Also: FR rear flange (not for strokes > 300 mm), TF both flanges, TM, FM foot, CM clevis.
4. Flange and rod-end dimensions indicative - confirm with ADONI TECH before fixing the interface.
5. Custom-orificed: full application data required at order. Bellows, safety cable, sensor on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
NAME		SIGNATURE		DATE		TITLE:			
DRAWN PARESH ADAVANI				05-07-22		ED 4.0 x 48 HEAVY-DUTY HYDRAULIC BUFFER - GA			
CHK'D									
APPV'D PARESH ADAVANI				07-07-22		DWG NO.			
MFG						AT/GA/ED/4.0X48			
Q.A						A4			
MATERIAL: Steel body, hard-chrome rod				WEIGHT: 220 kg		SCALE: 1:20		SHEET 1 OF 1	