
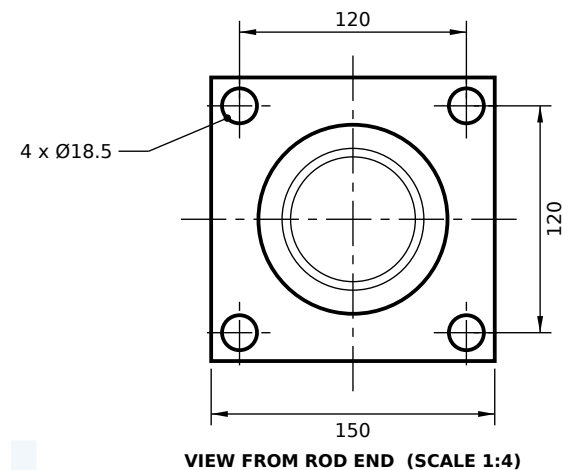


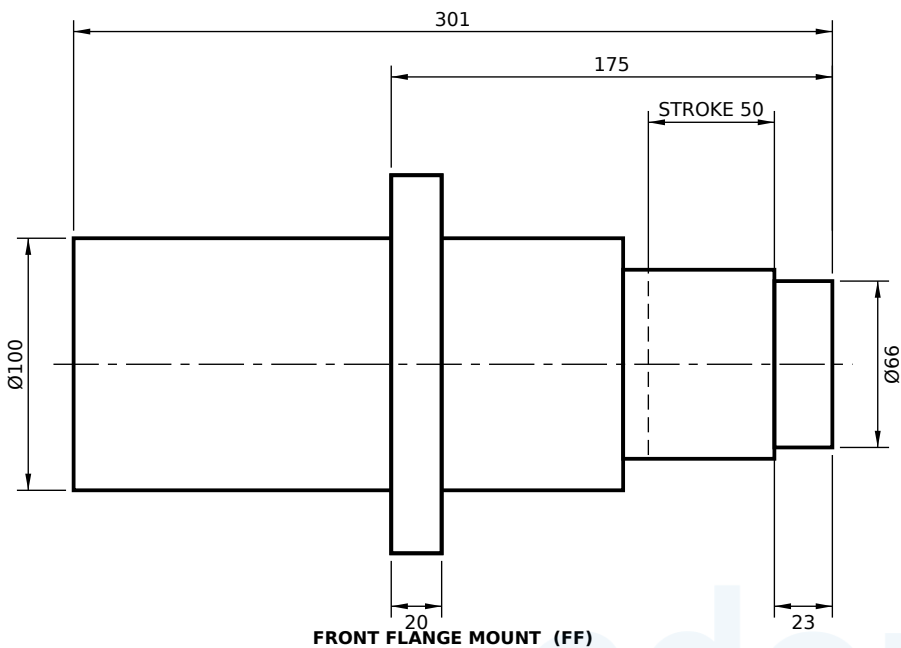

Technical Parameters

Stroke	50	mm
Energy capacity per cycle	11,500	Nm
Max. shock force	235	kN
Return force (extension)	1.65	kN
Return force (compression)	18	kN
Mounting bolts	4 x M16	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	16	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FF front flange shown. Also available: FR rear flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in								
	NAME		SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI				09-11-21		EI 100x50-FF HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT			
CHK'D										
APPV'D	PARESH ADAVANI				11-11-21		DWG NO. AT/GA/EI/100X50-FF			
MFG										
Q.A										
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 16 kg		SCALE: 1:3				SHEET 1 OF 1		
								A4		