



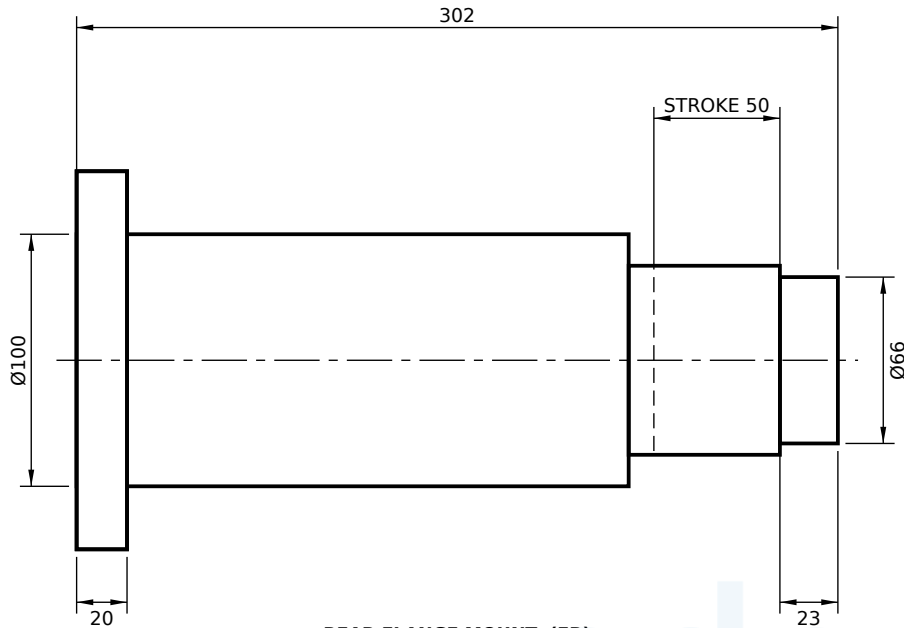

REAR FLANGE MOUNT (FR)

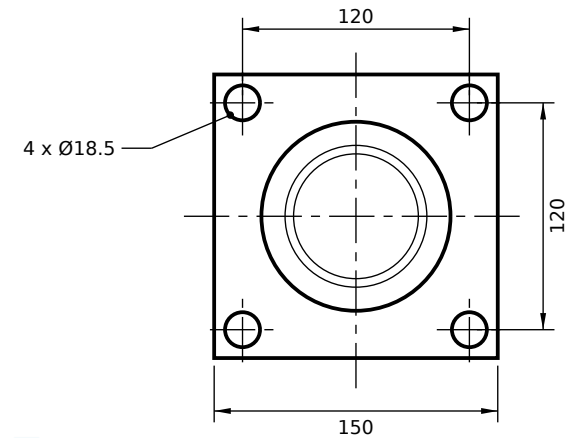

VIEW FROM ROD END (SCALE 1:4)

Technical Parameters

Stroke	50	mm
Energy capacity per cycle	11,500	Nm
Max. shock force	235	kN
Return force (extension)	1.65	kN
Return force (compression)	18	kN
Mounting bolts	4 x M16	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	16	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FR rear flange shown. Also available: FF front flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION A
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME	SIGNATURE	DATE	TITLE: EI 100x50-FR HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT	
DRAWN	PARESH ADAVANI		07-11-21		
CHK'D				DWG NO. AT/GA/EI/100X50-FR	
APPV'D	PARESH ADAVANI		09-11-21		
MFG				A4	
Q.A					
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 16 kg		SCALE: 1:3	SHEET 1 OF 1