
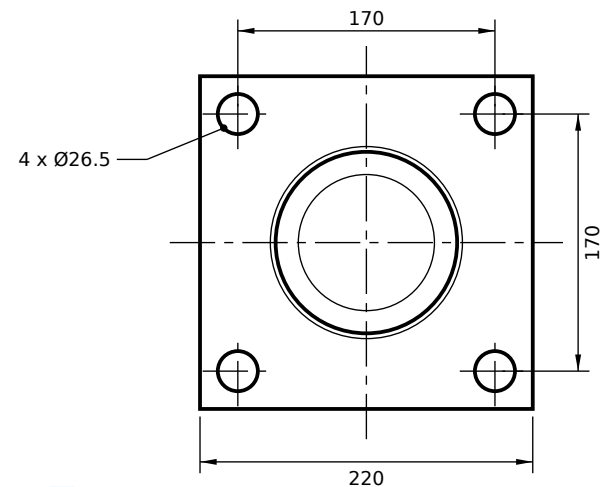


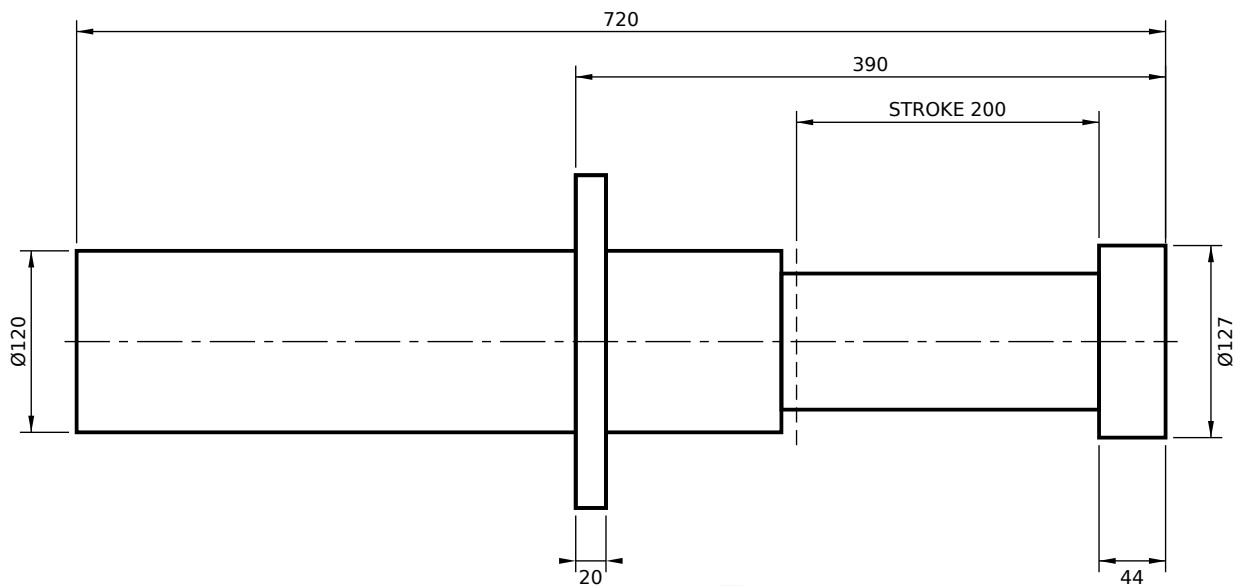

FRONT FLANGE MOUNT (FF)

VIEW FROM ROD END

Technical Parameters

Stroke	200	mm
Energy capacity per cycle	74,000	Nm
Max. shock force	375	kN
Return force (extension)	2.8	kN
Return force (compression)	50	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	43	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FF front flange shown. Also available: FR rear flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in							
	NAME		SIGNATURE		DATE		TITLE:		
DRAWN	PARESH ADAVANI				13-12-21		EI 120x200-FF HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT		
CHK'D									
APPV'D	PARESH ADAVANI				15-12-21		DWG NO. AT/GA/EI/120X200-FF		
MFG									
Q.A									
MATERIAL: Steel body, hard-chrome rod			WEIGHT: 43 kg			SCALE: 1:5		SHEET 1 OF 1	
						A4			