
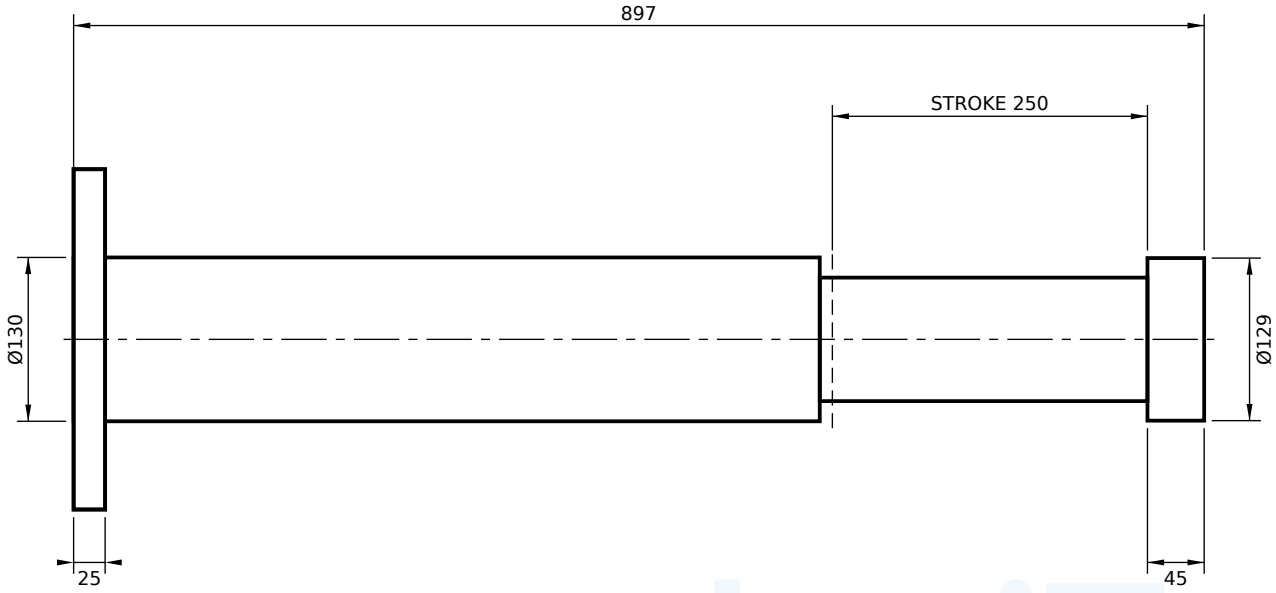


REAR FLANGE MOUNT (FR)

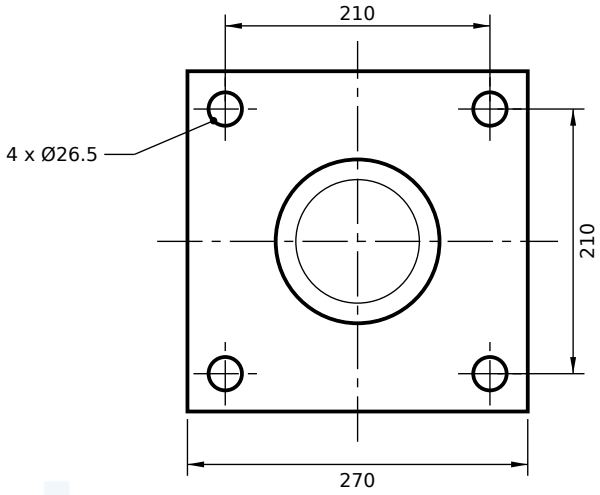

VIEW FROM ROD END

Technical Parameters

Stroke	250	mm
Energy capacity per cycle	115,000	Nm
Max. shock force	475	kN
Return force (extension)	3.2	kN
Return force (compression)	50	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	50	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FR rear flange shown. Also available: FF front flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

adoniTech

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE	FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION A

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		29-12-21
CHK'D			
APPV'D	PARESH ADAVANI		31-12-21
MFG			
Q.A			

MATERIAL: Steel body, hard-chrome rod | WEIGHT: 50 kg

adoniTech
ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

EI 130x250-FR

HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT

DWG NO. **AT/GA/EI/130X250-FR** | **A4**

SCALE: 1:6 | SHEET 1 OF 1