



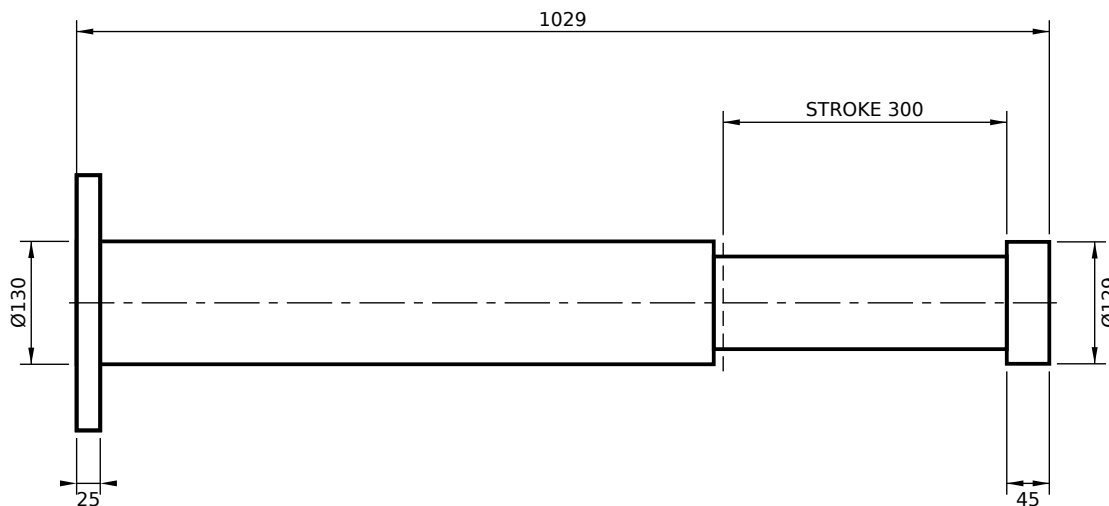

REAR FLANGE MOUNT (FR)

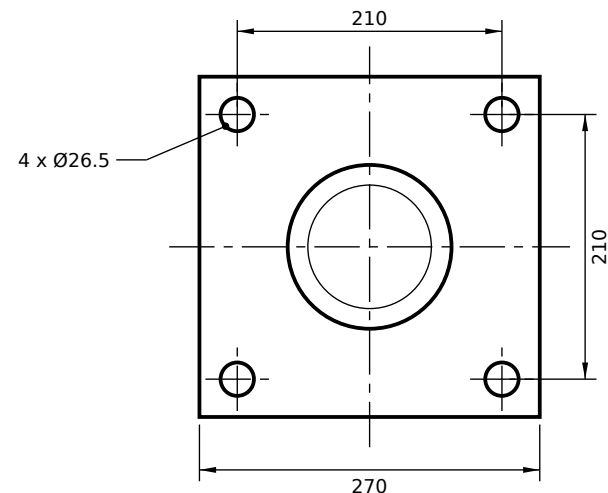

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	300	mm
Energy capacity per cycle	138,000	Nm
Max. shock force	475	kN
Return force (extension)	3.2	kN
Return force (compression)	50	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	50	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FR rear flange shown. Also available: FF front flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in							
	NAME		SIGNATURE		DATE		TITLE:		
DRAWN	PARESH ADAVANI				02-01-22		EI 130x300-FR HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT		
CHK'D									
APPV'D	PARESH ADAVANI				04-01-22		DWG NO.		A4
MFG							AT/GA/EI/130X300-FR		
Q.A									
MATERIAL: Steel body, hard-chrome rod			WEIGHT: 50 kg			SCALE: 1:8		SHEET 1 OF 1	