
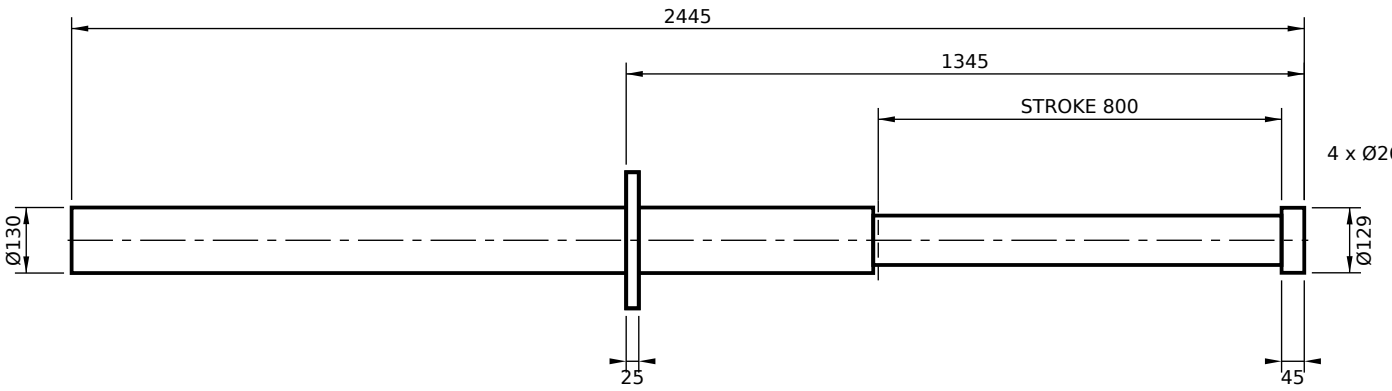


FRONT FLANGE MOUNT (FF)

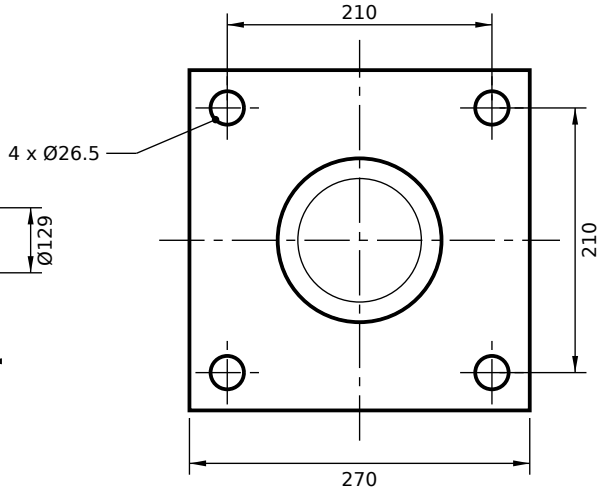

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	800	mm
Energy capacity per cycle	311,000	Nm
Max. shock force	400	kN
Return force (extension)	3.2	kN
Return force (compression)	45	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	45	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FF front flange shown. Also available: FR rear flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

adoniTech

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
GENERAL ARRANGEMENT - OUTLINE ONLY
DIMENSIONS SUBJECT TO CHANGE
WITHOUT PRIOR NOTICE
PROJECTION: FIRST ANGLE

FINISH: Painted yellow

DEBUR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING

REVISION **A**

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		12-01-22
CHK'D			
APPV'D	PARESH ADAVANI		14-01-22
MFG			
Q.A			

MATERIAL: Steel body, hard-chrome rod

WEIGHT: 45 kg

ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

EI 130x800-FF

HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT

DWG NO. **AT/GA/EI/130X800-FF**

A4

SCALE: 1:15

SHEET 1 OF 1