



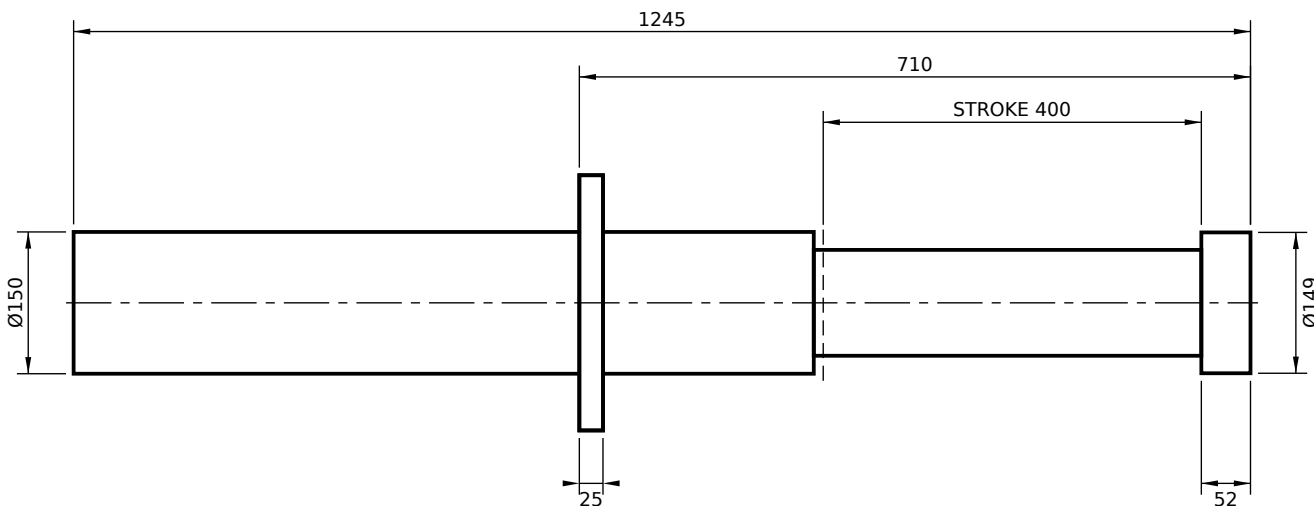

FRONT FLANGE MOUNT (FF)

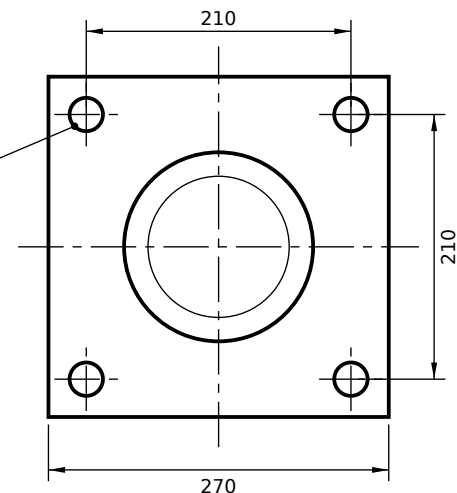

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	400	mm
Energy capacity per cycle	253,000	Nm
Max. shock force	645	kN
Return force (extension)	5	kN
Return force (compression)	62.4	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	62.4	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FF front flange shown. Also available: FR rear flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI				24-01-22		EI 150x400-FF HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT			
CHK'D										
APPV'D	PARESH ADAVANI				26-01-22		DWG NO.		A4	
MFG							AT/GA/EI/150X400-FF			
Q.A										
MATERIAL: Steel body, hard-chrome rod			WEIGHT: 62.4 kg			SCALE: 1:8		SHEET 1 OF 1		