



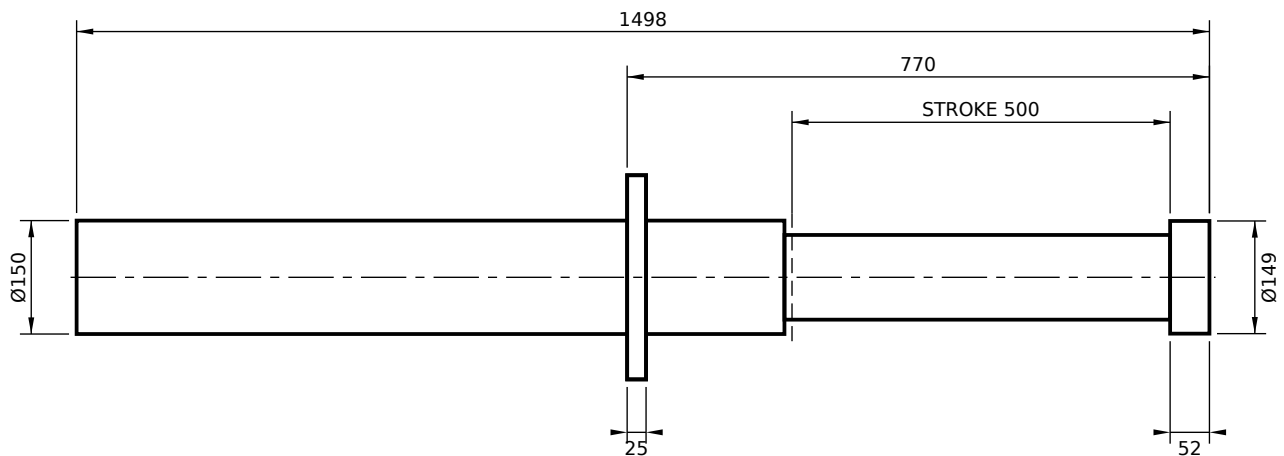

FRONT FLANGE MOUNT (FF)

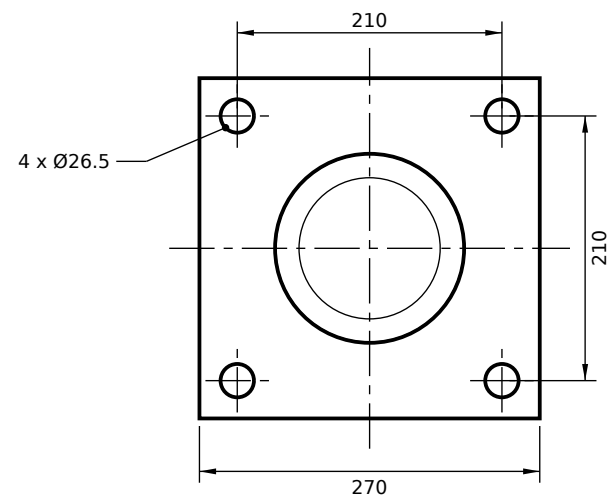

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	500	mm
Energy capacity per cycle	316,000	Nm
Max. shock force	645	kN
Return force (extension)	5	kN
Return force (compression)	75.5	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	75.5	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FF front flange shown. Also available: FR rear flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A	
				adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME	SIGNATURE		DATE		TITLE: EI 150x500-FF HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT	
DRAWN	PARESH ADAVANI			26-01-22			
CHK'D							
APPV'D	PARESH ADAVANI			28-01-22			
MFG							
Q.A						DWG NO. AT/GA/EI/150X500-FF	
						A4	
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 75.5 kg		SCALE: 1:10		SHEET 1 OF 1	