



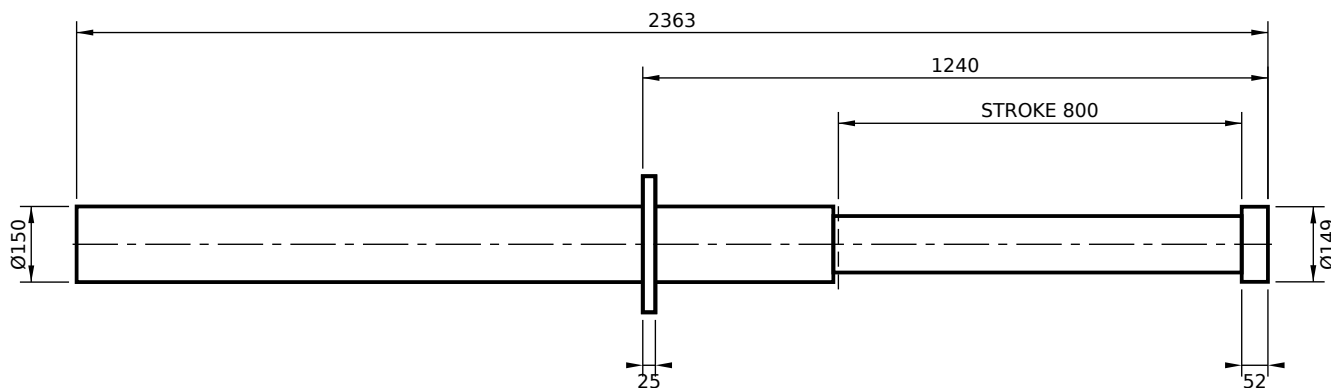

FRONT FLANGE MOUNT (FF)

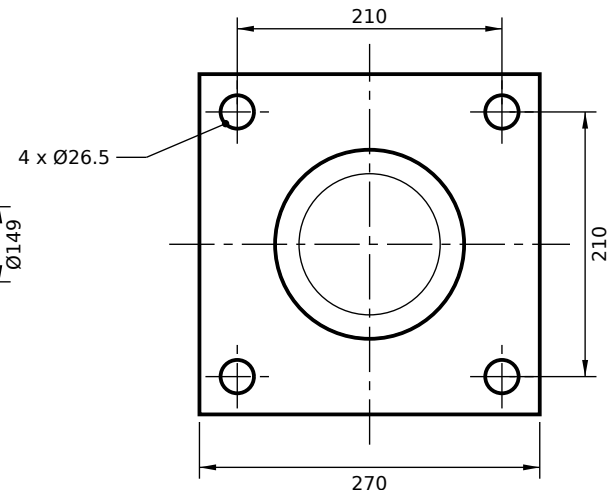

VIEW FROM ROD END (SCALE 1:6)

Technical Parameters

Stroke	800	mm
Energy capacity per cycle	515,000	Nm
Max. shock force	640	kN
Return force (extension)	5	kN
Return force (compression)	68	kN
Mounting bolts	4 x M24	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	68	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FF front flange shown. Also available: FR rear flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A			
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in		TITLE: EI 150x800-FF HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT			
DWG NO.		A4							
AT/GA/EI/150X800-FF									
SCALE: 1:15			SHEET 1 OF 1						
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 68 kg							