
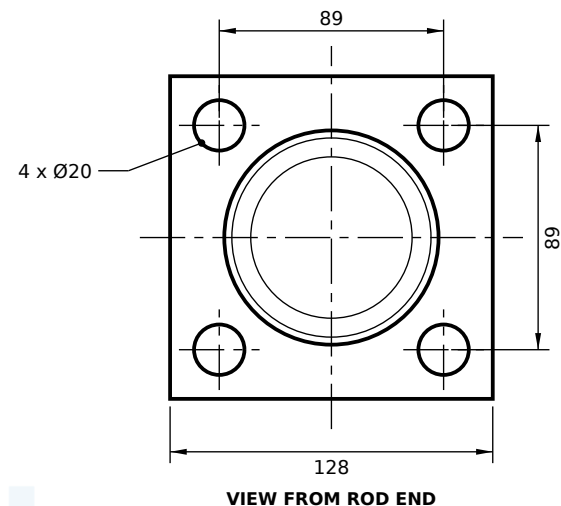


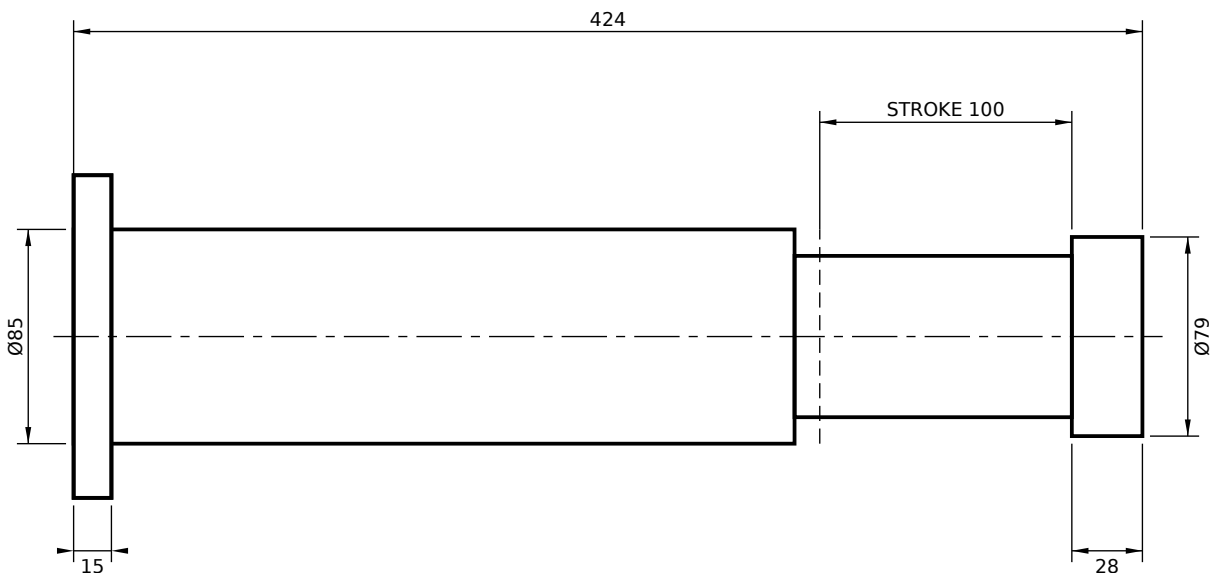

REAR FLANGE MOUNT (FR)

Technical Parameters

Stroke	100	mm
Energy capacity per cycle	15,600	Nm
Max. shock force	160	kN
Return force (extension)	1	kN
Return force (compression)	8	kN
Mounting bolts	4 x M18	
Nitrogen charging pressure	10	bar
Working temperature	10 to 50	°C
Weight (approx.)	22	kg

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker cap face at full stroke.
3. Mounting: FR rear flange shown. Also available: FF front flange.
4. Optional: B protective bellows over rod, C safety cable, rod position sensor.
5. Nitrogen-charged return; working temperature 10 to 50 °C; SS construction on request.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A		
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME	SIGNATURE	DATE	TITLE: EI 80x100-FR HYDRAULIC CRANE BUFFER - GENERAL ARRANGEMENT				
DRAWN	PARESH ADAVANI		05-11-21					
CHK'D				DWG NO. AT/GA/EI/80X100-FR				A4
APPV'D	PARESH ADAVANI		07-11-21					
MFG								
Q.A								
MATERIAL: Steel body, hard-chrome rod		WEIGHT: 22 kg		SCALE: 1:3		SHEET 1 OF 1		