


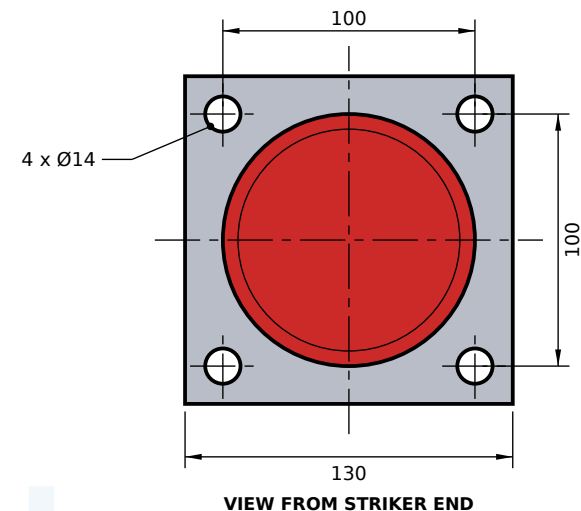

VIEW FROM STRIKER END

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Dashed line = striker face at maximum deflection.
3. Polyurethane (PU) foam buffer, shown in red, bonded to MS base plate; 4-bolt mounting.
4. Grooved profile controls the deflection characteristic; groove pattern per Adoni Tech design.
5. Operating temperature -20 to +80 °C.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

SHEET 1 OF 1