



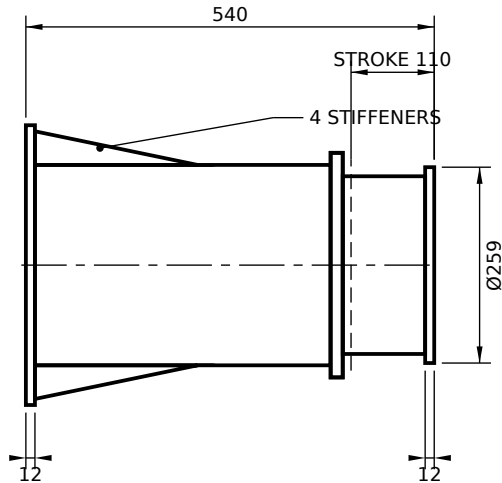

SPRING BUFFER - BASE PLATE MOUNT

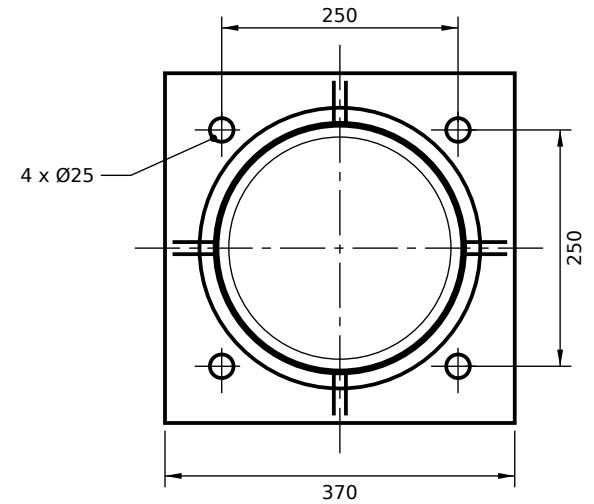

VIEW FROM STRIKER END (SCALE 1:8)

Technical Parameters

Stroke	110	mm
Energy capacity per stroke	5,000	Nm
Energy capacity per hour	1,500,000	Nm/h
Base plate	370 sq x 12 thk	mm
Front (striker) plate	Ø259 x 12 thk	mm
Mounting holes	4 x Ø25 on 250 sq	mm
Overall length	540	mm
Return	Helical spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		DRAWN PARESH ADAVANI		SIGNATURE		DATE 17-07-22		 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
CHK'D								TITLE: SB-1204F SPRING BUFFER - GENERAL ARRANGEMENT	
APPV'D PARESH ADAVANI						19-07-22		DWG NO. AT/GA/SB/1204F	
MFG								A4	
Q.A									
MATERIAL: MS housing, spring steel				WEIGHT:		SCALE: 1:10		SHEET 1 OF 1	