


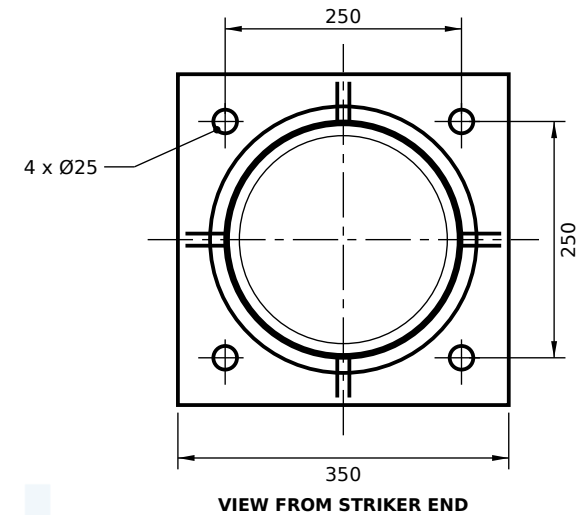

VIEW FROM STRIKER END

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE			FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
							adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE		TITLE: SB-1204G SPRING BUFFER - GENERAL ARRANGEMENT DWG NO. AT/GA/SB/1204G A4				
DRAWN	PARESH ADAVANI				19-07-22						
CHK'D											
APPV'D	PARESH ADAVANI				21-07-22						
MFG											
Q.A											
MATERIAL: MS housing, spring steel			WEIGHT:			SCALE: 1:8			SHEET 1 OF 1		