


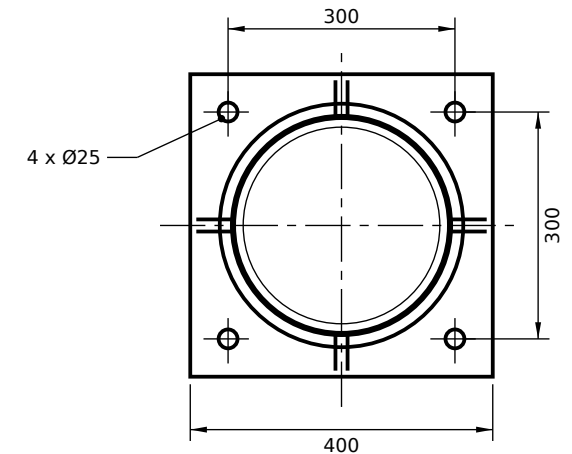

VIEW FROM STRIKER END

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
NAME		SIGNATURE		DATE		TITLE: SB-1220-A SPRING BUFFER - GENERAL ARRANGEMENT			
DRAWN		PARESH ADAVANI		21-07-22					
CHK'D									
APPV'D		PARESH ADAVANI		23-07-22					
MFG									
Q.A						DWG NO.		AT/GA/SB/1220-A	
MATERIAL: MS housing, spring steel						WEIGHT:		SCALE: 1:10	
								SHEET 1 OF 1	