
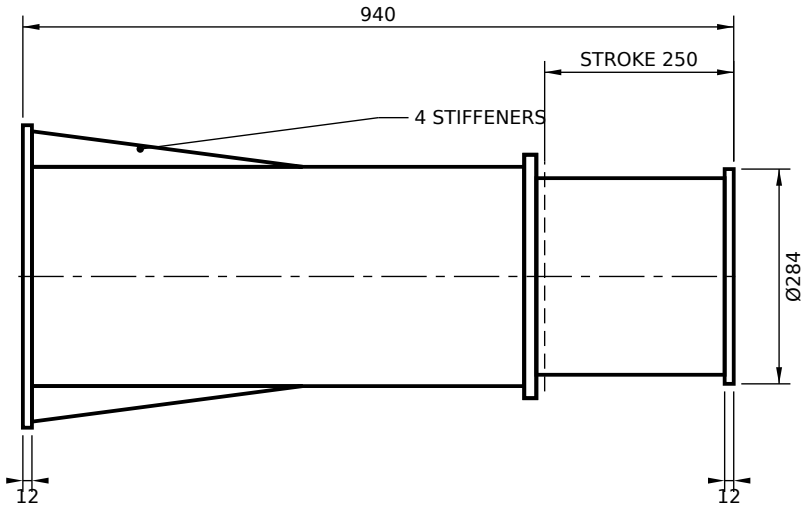


SPRING BUFFER - BASE PLATE MOUNT

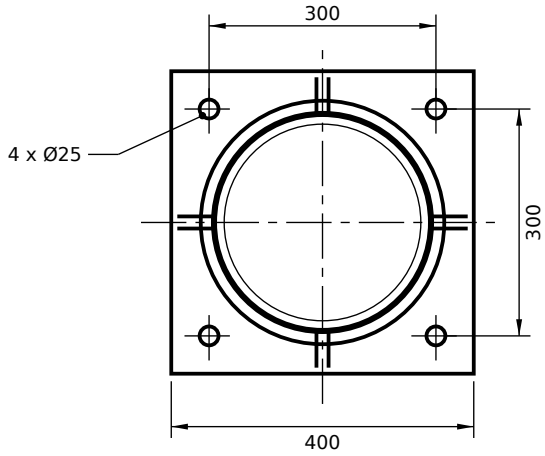

VIEW FROM STRIKER END

Technical Parameters

Stroke	250	mm
Energy capacity per stroke	10,400	Nm
Energy capacity per hour	3,120,000	Nm/h
Base plate	400 sq x 12 thk	mm
Front (striker) plate	Ø284 x 12 thk	mm
Mounting holes	4 x Ø25 on 300 sq	mm
Overall length	940	mm
Return	Helical spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

adoniTech

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE	FINISH: Painted yellow	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION A

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		23-07-22
CHK'D			
APPV'D	PARESH ADAVANI		25-07-22
MFG			
Q.A			

MATERIAL: MS housing, spring steel | WEIGHT:

adoniTech
ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

SB-1220-B

SPRING BUFFER - GENERAL ARRANGEMENT

DWG NO. **AT/GA/SB/1220-B**

A4

SCALE: 1:10 | SHEET 1 OF 1