


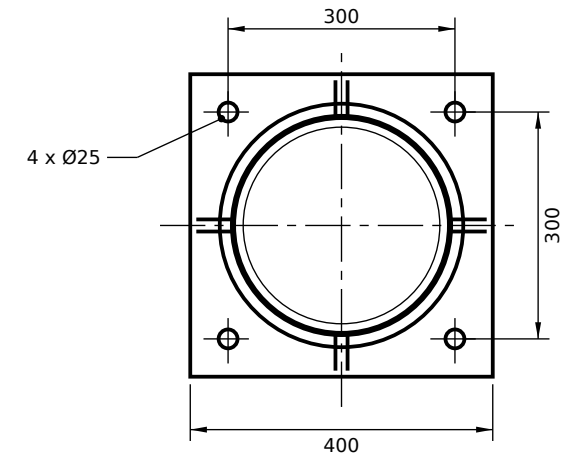

VIEW FROM STRIKER END

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

A4