


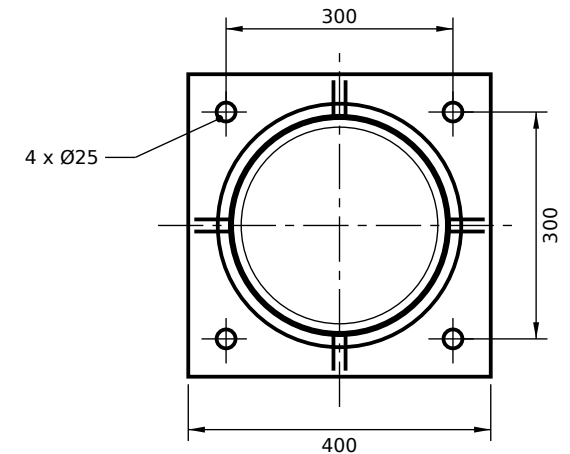

VIEW FROM STRIKER END

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME		SIGNATURE		DATE		TITLE: SB-1220-D SPRING BUFFER - GENERAL ARRANGEMENT		
DRAWN	PARESH ADAVANI				27-07-22				
CHK'D									
APPV'D	PARESH ADAVANI				29-07-22				
MFG									
Q.A							DWG NO.		A4
						AT/GA/SB/1220-D			
MATERIAL: MS housing, spring steel			WEIGHT:			SCALE: 1:10		SHEET 1 OF 1	