
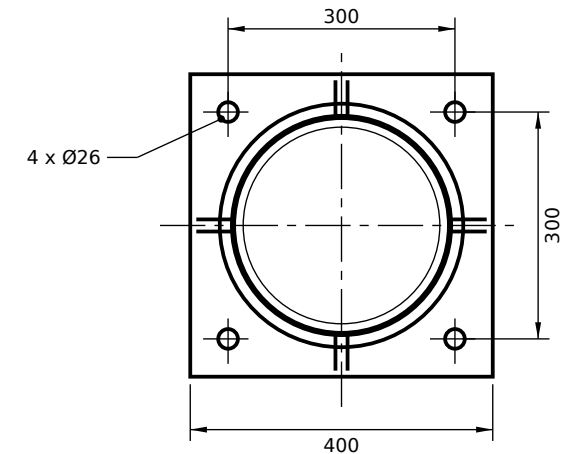


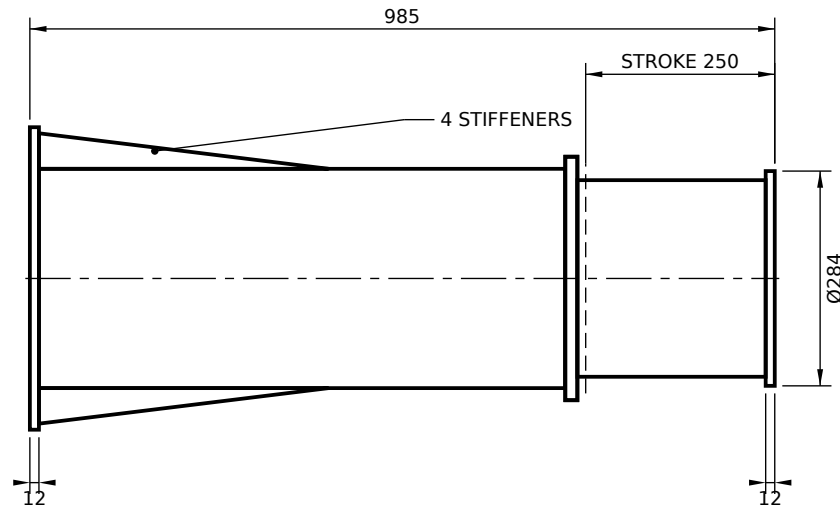

SPRING BUFFER - BASE PLATE MOUNT

Technical Parameters

Stroke	250	mm
Energy capacity per stroke	14,000	Nm
Energy capacity per hour	4,200,000	Nm/h
Base plate	400 sq x 12 thk	mm
Front (striker) plate	Ø284 x 12 thk	mm
Mounting holes	4 x Ø26 on 300 sq	mm
Overall length	985	mm
Return	Helical spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
								adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME			SIGNATURE			DATE		TITLE: SB-1220-G SPRING BUFFER - GENERAL ARRANGEMENT DWG NO. AT/GA/SB/1220-G A4			
DRAWN	PARESH ADAVANI						02-08-22					
CHK'D												
APPV'D	PARESH ADAVANI						04-08-22					
MFG												
Q.A												
MATERIAL: MS housing, spring steel				WEIGHT:				SCALE: 1:10			SHEET 1 OF 1	