
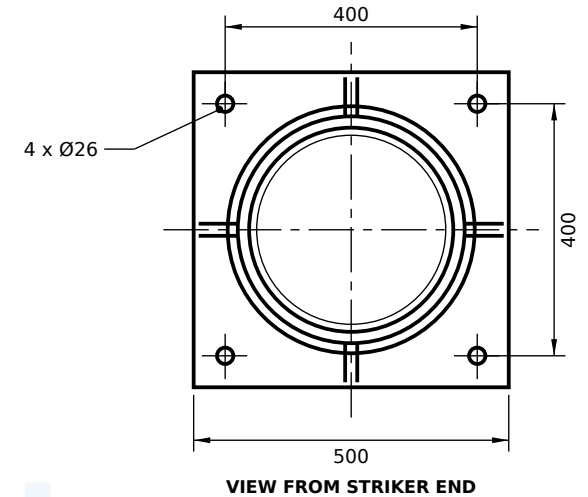


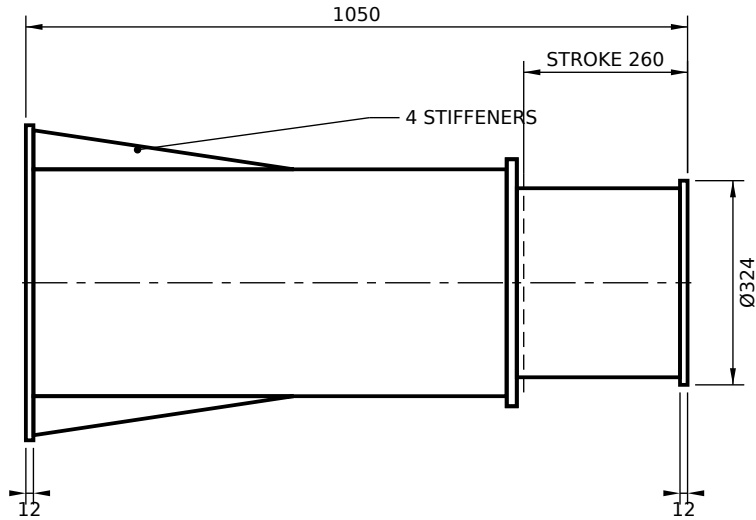

SPRING BUFFER - BASE PLATE MOUNT

Technical Parameters

Stroke	260	mm
Energy capacity per stroke	28,000	Nm
Energy capacity per hour	8,400,000	Nm/h
Base plate	500 sq x 12 thk	mm
Front (striker) plate	Ø324 x 12 thk	mm
Mounting holes	4 x Ø26 on 400 sq	mm
Overall length	1050	mm
Return	Helical spring	

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown free; dashed line = striker plate face at full stroke.
- Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
- MS fabricated housing, painted yellow; spring steel helical spring.
- Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
- Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		DRAWN PARESH ADAVANI		SIGNATURE		DATE 06-08-22		TITLE: SB-1220-J SPRING BUFFER - GENERAL ARRANGEMENT	
CHK'D								DWG NO.	
APPV'D PARESH ADAVANI						08-08-22		AT/GA/SB/1220-J	
MFG								A4	
Q.A									
MATERIAL: MS housing, spring steel				WEIGHT:				SCALE: 1:12	
								SHEET 1 OF 1	