



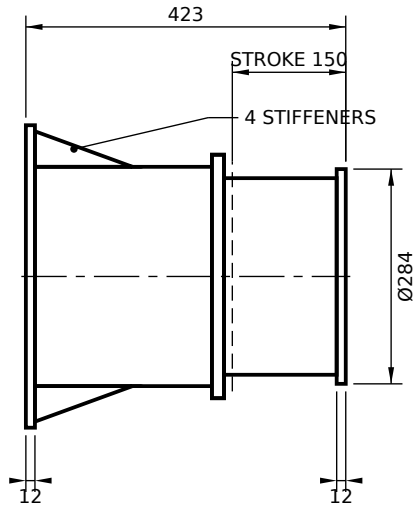

SPRING BUFFER - BASE PLATE MOUNT

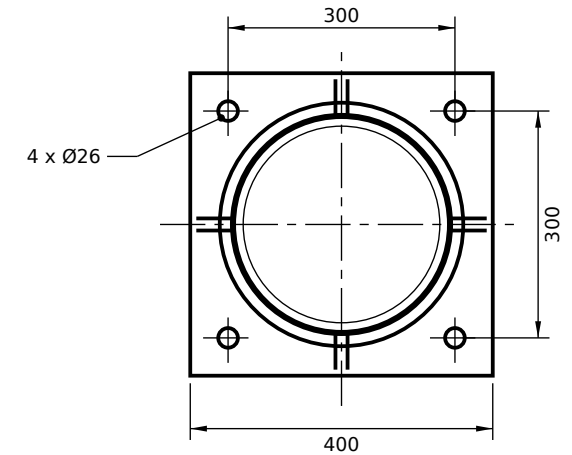

VIEW FROM STRIKER END

Technical Parameters

Stroke	150	mm
Energy capacity per stroke	10,700	Nm
Energy capacity per hour	3,210,000	Nm/h
Base plate	400 sq x 12 thk	mm
Front (striker) plate	Ø284 x 12 thk	mm
Mounting holes	4 x Ø26 on 300 sq	mm
Overall length	423	mm
Return	Helical spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME	SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI			08-08-22		SB-1220-K SPRING BUFFER - GENERAL ARRANGEMENT			
CHK'D									
APPV'D	PARESH ADAVANI			10-08-22		DWG NO.			
MFG						AT/GA/SB/1220-K			
Q.A									
MATERIAL: MS housing, spring steel		WEIGHT:		SCALE: 1:10		SHEET 1 OF 1			