



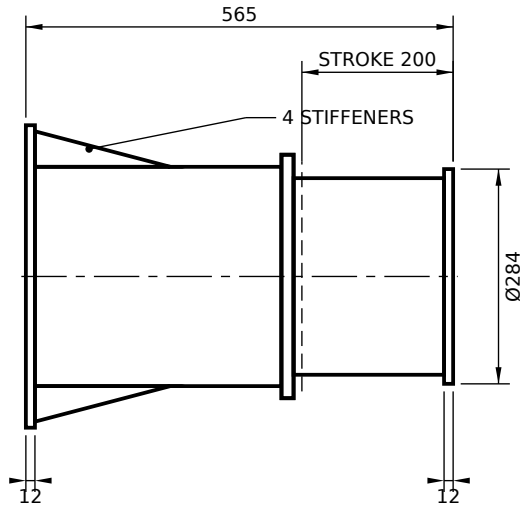

SPRING BUFFER - BASE PLATE MOUNT

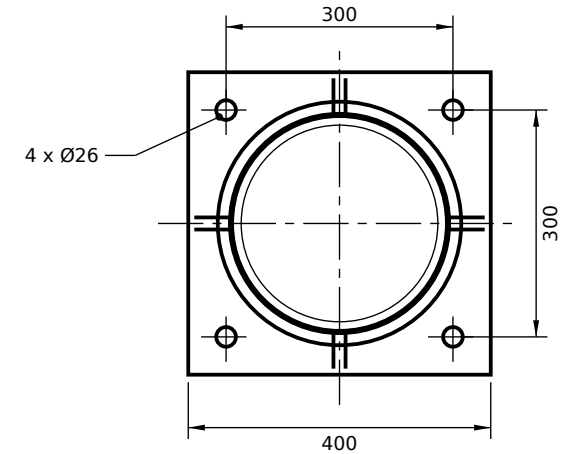

VIEW FROM STRIKER END

Technical Parameters

Stroke	200	mm
Energy capacity per stroke	8,300	Nm
Energy capacity per hour	2,490,000	Nm/h
Base plate	400 sq x 12 thk	mm
Front (striker) plate	Ø284 x 12 thk	mm
Mounting holes	4 x Ø26 on 300 sq	mm
Overall length	565	mm
Return	Helical spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown free; dashed line = striker plate face at full stroke.
3. Base plate mounting, 4 bolts; 4 gusset stiffeners between base plate and housing are standard.
4. MS fabricated housing, painted yellow; spring steel helical spring.
5. Housing cylindrical, MS fabricated; front plate diameter per Adoni Tech design.
6. Selection: www.cranebuffer.com | impactcal.netlify.app

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Painted yellow		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
						adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME		SIGNATURE		DATE		TITLE: SB-1220-L SPRING BUFFER - GENERAL ARRANGEMENT				
DRAWN	PARESH ADAVANI				10-08-22						
CHK'D											
APPV'D	PARESH ADAVANI				12-08-22						
MFG							DWG NO.		A4		
Q.A							AT/GA/SB/1220-L				
MATERIAL: MS housing, spring steel			WEIGHT:			SCALE: 1:10			SHEET 1 OF 1		