
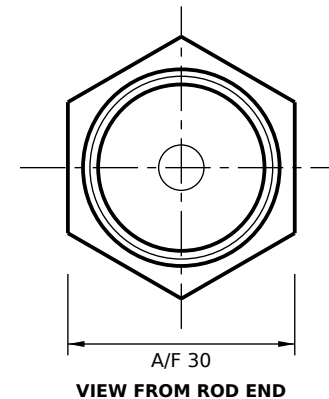


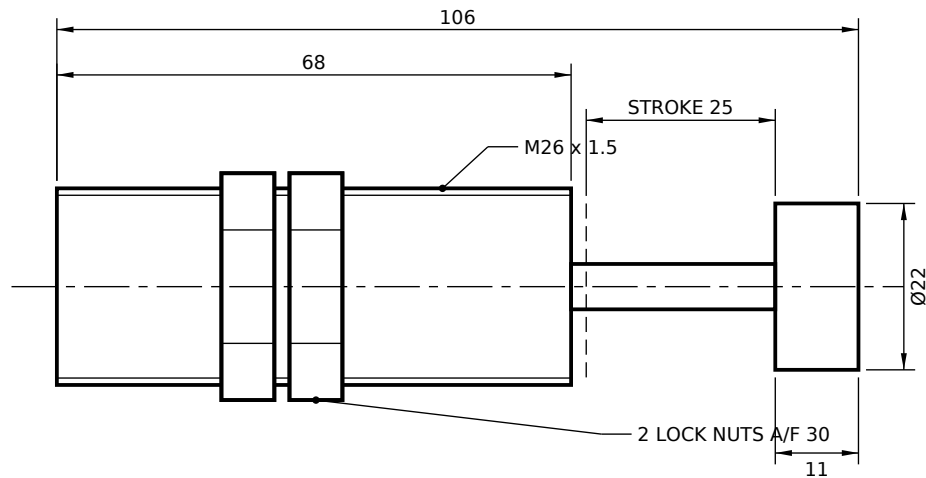

Technical Parameters

Stroke	25	mm
Thread	M 26X1.5	
Energy capacity per stroke	80	Nm
Energy capacity per hour	90,000	Nm/h
Impact velocity	0.1 - 2.5	m/s
Temperature range	-10 to +80	°C
Damping	Fixed, single acting	
Rod end shown	PU cap (std)	
Return	Internal spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: MC metallic cap, PU cap (shown), NC no cap - order code YSR model + MC / PU / NC.
4. Housing steel, anticorrosive black finish; PU seals; hard-chrome ground rod; built-in mechanical end stop.
5. Body length and cap projection indicative - confirm with ADONI TECH before fixing the interface.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A		
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME	SIGNATURE		DATE		TITLE: YSR-20-25 FIXED-DAMPING SHOCK ABSORBER - GA		
DRAWN	PARESH ADAVANI			17-09-26				
CHK'D								
APPV'D	PARESH ADAVANI			17-09-26				
MFG								
Q.A						DWG NO. AT/GA/YSRA/20-25		A4
MATERIAL: Steel housing, HCP rod		WEIGHT:		SCALE: 1:1				