
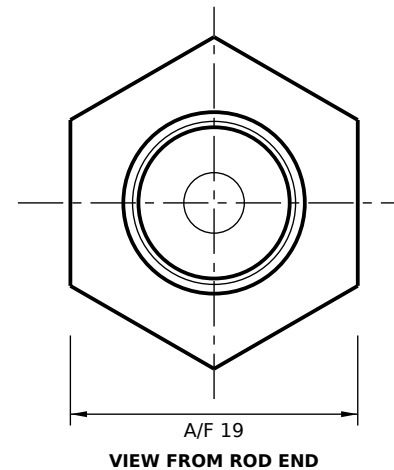


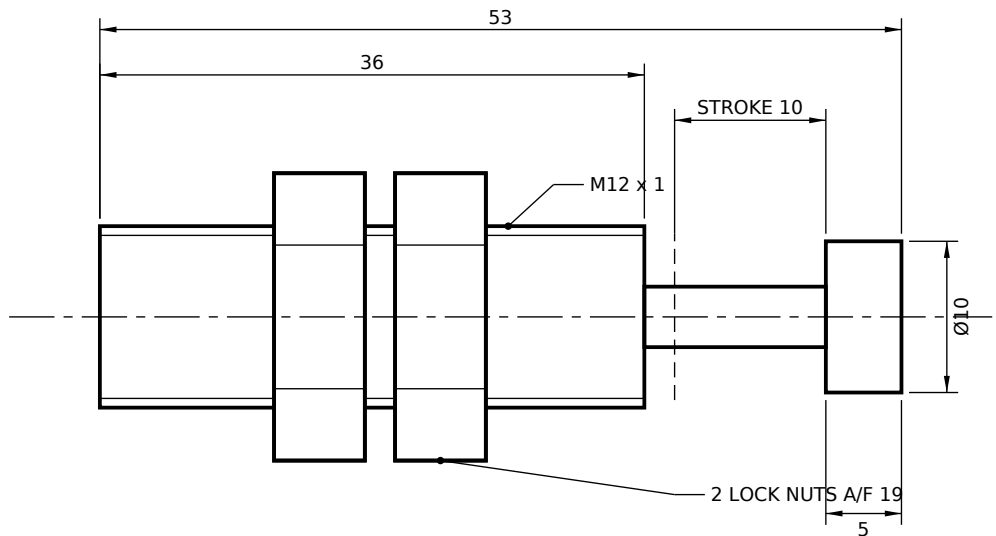

Technical Parameters

Stroke	10	mm
Thread	M 12X1	
Energy capacity per stroke	5	Nm
Energy capacity per hour	16,000	Nm/h
Impact velocity	0.1 - 2.5	m/s
Temperature range	-10 to +80	°C
Damping	Fixed, single acting	
Rod end shown	PU cap (std)	
Return	Internal spring	

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: MC metallic cap, PU cap (shown), NC no cap - order code YSR model + MC / PU / NC.
4. Housing steel, anticorrosive black finish; PU seals; hard-chrome ground rod; built-in mechanical end stop.
5. Body length and cap projection indicative - confirm with ADONI TECH before fixing the interface.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in								
	NAME		SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI				17-09-26		YSR-8-8 FIXED-DAMPING SHOCK ABSORBER - GA			
CHK'D										
APPV'D	PARESH ADAVANI				17-09-26		DWG NO. AT/GA/YSRA/8-8			
MFG										
Q.A							A4			
MATERIAL: Steel housing, HCP rod		WEIGHT:				SCALE: 2:1				