

PRINCIPALES UTILISATIONS

Robinet à soupape avec raccord symétrique
Demi-raccord symétrique avec bride

DOCUMENTS DE REFERENCE

52-C DIN 14302
75-B DIN 14303

FOURNISSEUR FABRICANT

Non imposé

ETAT DE LIVRAISON

-

DOCUMENTS DE CONTROLE

Document de controle suivant NF EN 10-204 type 2.1, type 2.2, type 3.1, type 3.2 si specifié sur la commande.

MATERIEL AVEC APPROBATION

Sans

MATIERE TRAITEMENT DE SURFACE

Bouchon : Bronze
Joint : Néoprène ou Buna Nitril
Chaînette : Acier laitoné ou Acier Galvanisé

CARACTERISTIQUES

Pression de service : 16 bars

MAIN USES

Globe valve with symetric coupling
symmetrical Half-connection with flange

REFERENCE DOCUMENTS

52-C DIN 14302
75-B DIN 14303

SUPPLIER MANUFACTURER

No imposed

DELIVERY STATUS

-

CONTROL DOCUMENTS

Certificate according to NF EN 10204 type 2.1, type 2.2, type 3.1, type 3.2 if specified on the order

MATERIAL WITH APPROVAL



Without

MATERIAL SURFACE TREATMENT

Stopper : Bronze
Joint : Neoprene or Buna Nitril
Chain : Brassplated steel or Galvanized steel

CHARACTERISTICS

Working pressure : 16 bars

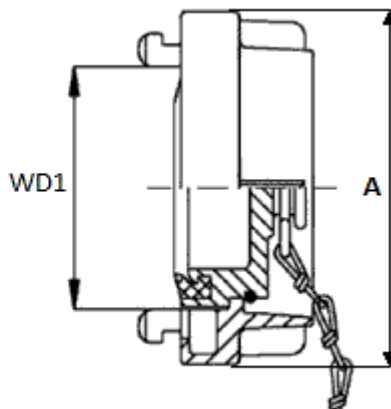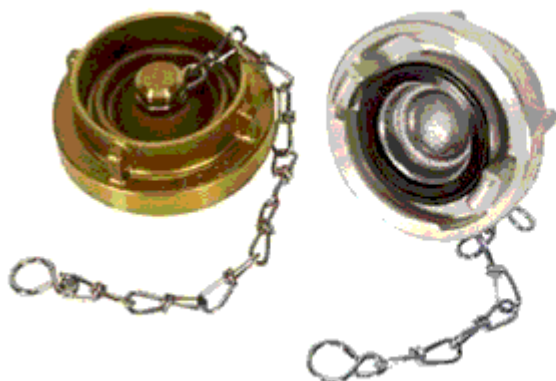

Référence Objet	DN1 (mm)	Weight (kg)	Work Diam 1 WD1 (mm)	A (mm)	Type (-)
5000005412	40	.2	66	98	52-C
5000005417	65	.52	89	126	75-B