

PRINCIPALES UTILISATIONS

Brouillard d'eau H.P.

MAIN USES

Water mist H.P.

APPLICABILITE POTENTIELLE NAVIRE

Passagers Militaire Méthanier Rapide

POTENTIAL SHIP APPLICABILITY

Passengers Military LNG Tanker High speed craft

DOCUMENTS DE REFERENCE

REFERENCE DOCUMENTS

MATIERE / TRAITEMENT DE SURFACE

Corps : Acier inox 316Ti

MATERIAL / TREATMENT SURFACE

Body material : Stainless steel 316Ti

CARACTERISTIQUES

Selon DIN 2353.

Plage de température admise : [-10°C ; 100°C].

DIN EN 10088

CHARACTERISTICS

According to DIN 2353.

Temperature rating : [-10°C ; 100°C].

DIN EN 10088.

DN	Diam mm	Longueur équivalent tuyau mm	Face 1 To Face 2 mm	Longueur de l'opérateur mm	Hauteur globale de la vanne mm	Masse kg	Réf. Objet
8	12	73	102	132.5	82	1	5000011163
15	22	90	119	190	118	1.9	5000011164
21	28	97	125	190	128	2.4	5000011165
32	42	90	159	320	121	8.3	5000011166

DOCUMENT DE CONTROLE - A délivrer par le fournisseur

I CONTROL DOCUMENTS - To be delivered by the supplier

- Document de contrôle suivant NF EN 10-204 type 2.1, type

2.2, type

3.1, type 3.2 si spécifié sur la commande.

Certificate according to NF EN 10204 type 2.1, type 2.2, type

3.1, type

3.2 if specified on the order

MATERIEL AVEC APPROBATION / MATERIAL WITH

APPROVAL

Approbation de type / type approbation

- Sans

FOURNISSEURS / TYPE

SUPPLIER / TYPE

- ULTRA FOG

NORME DE REFERENCE

REFERENCE NORM

ETAT DE LIVRAISON et DE

CONDITIONNEMENT

DELIVERY AND

CONDITIONNING STATUS

-

Resp. Standardisation :

B.ABGUILLERM

Le : 7 - 03 - 2017


Resp. Fonction Technique :

J.KAUB

Le : 7 - 03 - 2017

Rév. A : (L.ANDRE le 03/03/2017) Création du document

REV	DATE	DESCRIPTION	BY	CHK	APP
1	14/03/12				

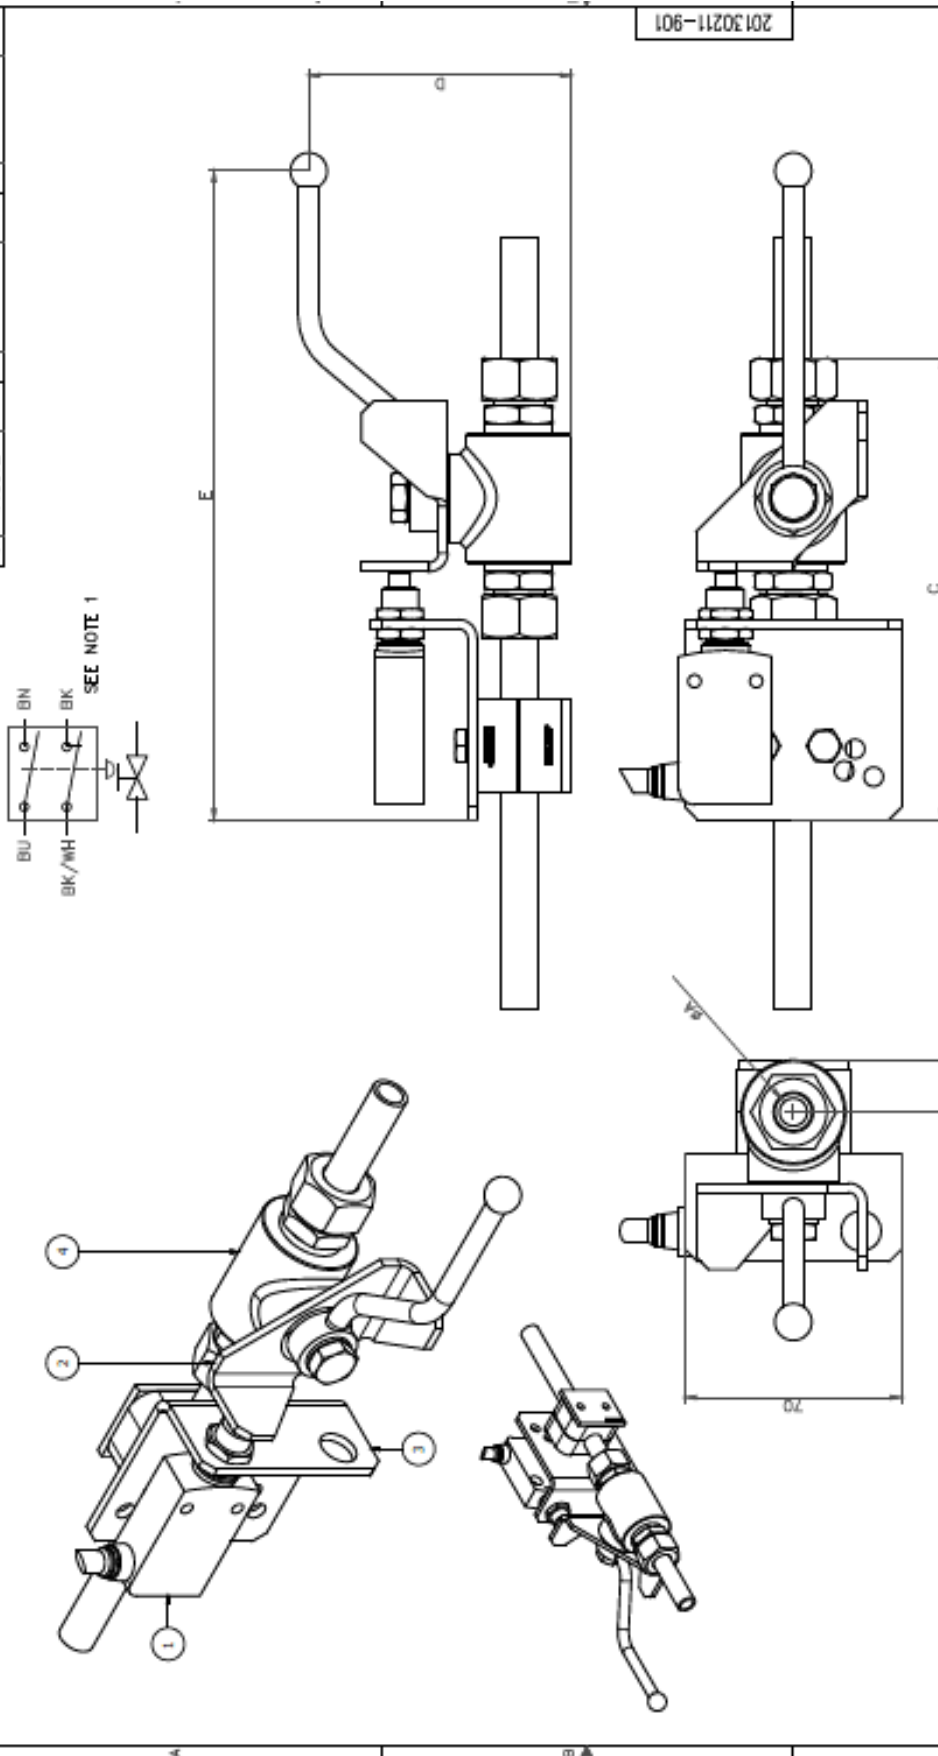


NOTES:
1. BALL VALVE WITH LIMIT SWITCH SYMBOL
USED FOR IDENTIFICATION PURPOSES ON DIAGRAMS.
2. THE BALL VALVE AND PIPE ARE INSTALLATION MATERIAL AND IS NOT
INCLUDED IN THE LIMIT SWITCH KIT.

LIMIT KIT	A	B	C	D	E
201.30211-101	ø12	25	150	100	150
201.30211-201	ø22	30	170	90	320
201.30211-205	ø28	35	170	90	320
201.30211-301	ø42	40	210	90	350



REV	DATE	DESCRIPTION	BY	CHK	APP
1	14/03/12				

201.30211-901

PROJ.	REV.	DATE	DESIGNER	CHECKER	APPROVED	REVISION

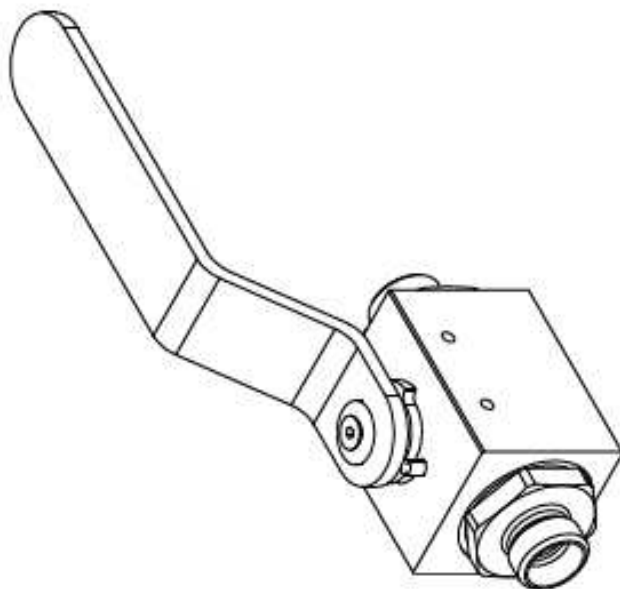

- Manufacturer : Parker
- Manufacturer P/N: CPKH12L3114547 IX
- PN: 500 bar
- Temperature Range: -30°C / +100°C

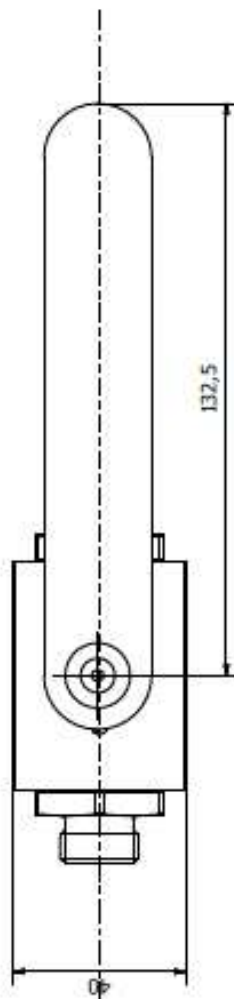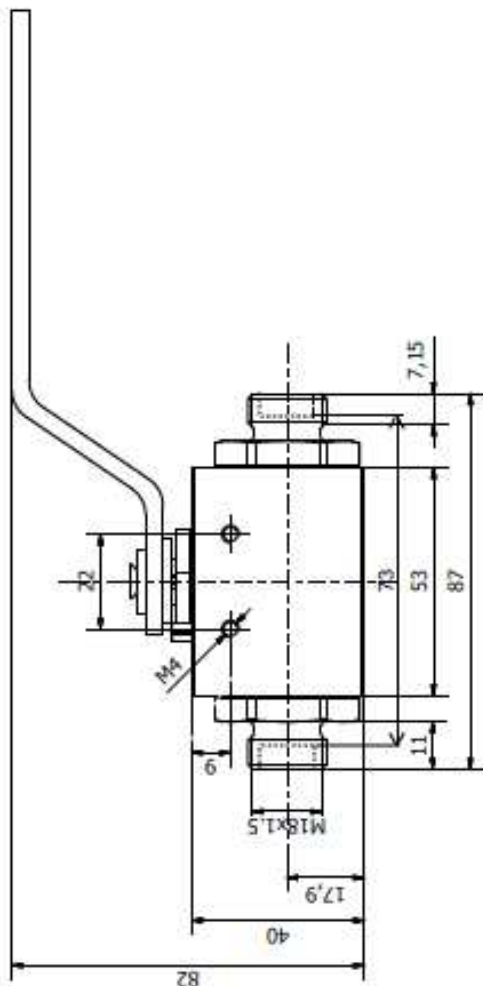

1001320-P		ULTRA FOG AB		SCALE 1:1		1001320-P		LIMIT SWITCH		BALL VALVE BKH-12-SY FOR		MATERIAL	
DESIGN BY A.O.	1608	UF	A3	2.5 TALL		1001320-P		LIMIT SWITCH		BALL VALVE BKH-12-SY FOR		MATERIAL	
DESIGNED BY A.O.	1608	D	YES	6.3		1001320-P		LIMIT SWITCH		BALL VALVE BKH-12-SY FOR		MATERIAL	
ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES: FRACTIONAL DECIMALS (FRACTIONS) FRACTIONAL DECIMALS (FRACTIONS) FRACTIONAL DECIMALS (FRACTIONS) FRACTIONAL DECIMALS (FRACTIONS)												MATERIAL	

