
	<b>COUDE 45° LONG EMBOUT MALE / MALE EN POLYBUTENE (PB)</b>	
	<b>LONG SPIGOT 45° ELBOW POLYBUTENE (PB)</b>	<b>B.51.22.R3.35</b> REV <b>A</b>
	<b>MATERIAL STANDARD</b> MATERIAL STANDARD	<b>Page 1 / 2</b>

Rev : A	Apprv. B.ABGUILLERM 23/05/13	Check. R.GREGOIRE 23/05/13	Design. M.BERTHO 21/05/13
Rev. (A) Document creation.			

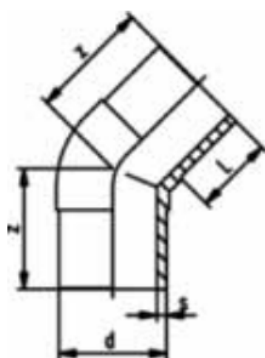

Diamètre d mm	DN	Z mm	L mm	Poids kg	Référence Objet
160	<b>150</b>	162	102	2,500	<b>SA046952</b>
225	<b>200</b>	200	122	5,500	<b>SA046953</b>

#### Matière :

Polybutène (PB) (=polybutylene)

#### Material:

Polybutene (PB) (=polybutylene)

#### Info.:

Le contenu technique de ce standard est équivalent au standard finlandais : MST.

#### Info.:

The technical content of this standard is equivalent to the standard MST.

#### TRAITEMENT DE SURFACE

-

#### SURFACE TREATMENT


-

#### CARACTERISTIQUE

Transport Eau froide et Eau chaude sanitaire (0° à 70°C)  
(Courte période à 95°C)  
PN10 à 70°C  
Rugosité du tube : k=0.007

#### CHARACTERISTICS

Fresh and Hot sanitary water transport (0° at 70°C)  
(Shorts periods up to 95°C)  
PN10 at 70°C  
roughness tube : k=0.007

 <a href="https://ged.stxeu...">https://ged.stxeu...</a>	<b>COUDE 45° LONG EMBOUT MALE / MALE EN POLYBUTENE (PB)</b>	
	<b>LONG SPIGOT 45°ELBOW POLYBUTENE (PB)</b>	<b>B.51.22.R3.35</b> REV <b>A</b>
<b>MATERIAL STANDARD</b> MATERIAL STANDARD	<b>Page 2 / 2</b>	

#### DESIGNATION

-

#### DOCUMENT DE CONTROLE - A délivrer par le fournisseur

-Certificat d'approbation de type suivant IMO  
résolution A.753

#### MATERIEL AVEC APPROBATION Approbation de type

- BV, DNV, LR

#### INFORMATION COMPLEMENTAIRE:

#### FOURNISSEURS

- Georg Fischer (+GF+), gamme : instaflex

#### DOCUMENTS DE REFERENCE

#### NORME DE REFERENCE

- DIN16968 et 16969
- ASTM D635

#### COMMENTAIRE

- Raccordement par polyfusion

#### DESIGNATION

--

#### CONTROL DOCUMENTS - To be delivered by the supplier

- certificate of type approbation as per as IMO  
resolution A.753.

#### MATERIAL WITH APPROVAL type approbation

- BV, DNV, LR

#### Additional info:

#### TYPE SUPPLIER

- Georg Fischer (+GF+),range : instaflex

#### REFERENCE DOCUMENTS

#### REFERENCE NORM

- DIN16968 and 16969
- ASTM D635

#### COMMENTARY

- polyfusion junction.